






MultiMeter-PocketBox

Universal multimeter in practical box format with automatic range changeover

This universal multimeter allows fast and accurate measurement of voltage, current and resistance. Integrity and polarity can be determined using the diode test function. The automatic continuity tester sends an acoustic signal to the user. No inconvenient cables have to be reconnected to switch between functions and ranges. The hold function allows the current measured value to be retained in the display – ideal for hard-to-reach measuring points.

- Accurate testing of voltage, current and resistance
- Automatic continuity tester
- Diode test function for determining integrity and polarity
- Switch between function and range without reconnecting cables
- Easy-to-read display
- Hold function for locking the current measured value on the display

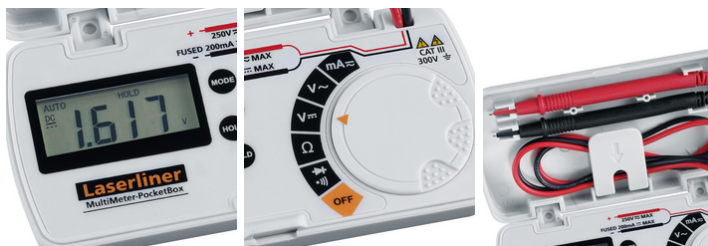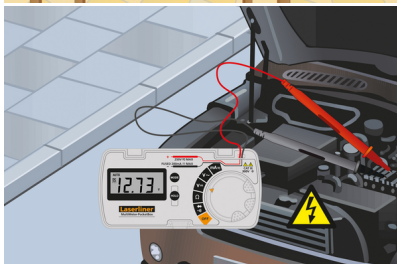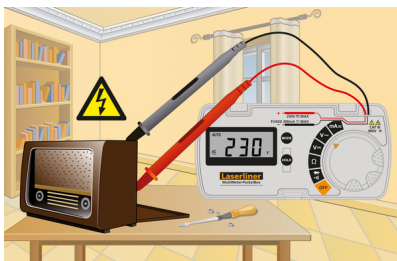

TECHNICAL DATA

Measured Variable	Direct current / alternating current Direct voltage / alternating voltage Resistance
Features	automatic measuring range HOLD
AC Voltage	Range / Resolution / Accuracy*: 2.000V / 1 mV / ± (1.0% + 5) 20.00V / 10 mV / ± (1.0% + 5) 200.0V / 0.1V / ± (1.0% + 5) 250V / 0.1V / ± (1.2% + 5) Bandwidth: 50 ... 60 Hz
DC Voltage	Range / Resolution / Accuracy*: 200 mV / 0.1 mV / ± (0.8% + 5) 2.000V / 1 mV / ± (0.8% + 5) 20.00V / 10 mV / ± (0.8% + 5) 200.0V / 0.1V / ± (0.8% + 5) 250V / 0.1V / ± (1.0% + 5)
Dimensions (W x H x D)	56 mm x 113 mm x 23 mm
	* ± accuracy = [(% of measured value (rdg)) + (number of least significant digits (digit))]

SCOPE OF DELIVERY



Item No. 083.028A GTIN (EAN) 4021563690053 SU 5