

Laserliner

MEASURING TECHNOLOGY. SIMPLE. PRECISE.

Retail Program

**UPDATE
2025/26**



**REDUCED
ECOLOGICAL
FOOTPRINT**

**INCLUDES
PERFECT
BBQ**

Extensive product range for demanding end-users and building professionals.

Laserliner is a proficient partner around the world. In the planning, construction, modernisation, renovation and restoration, Laserliner instruments are characterised by numerous technical innovations.

The 4 year warranty represents an outstanding service with clear advantages.
Dependable products for greater reliability in everyday use, saving time and money.

Convincing performance demands the highest standards – Laserliner is committed to quality management the legal standards according to DIN EN ISO standards comply with the TÜV Nord certification.

To make Laserliner products sustainable, a resource-saving production and packaging concept is implemented. Laserliner develops products that not only help you to work more accurately and efficiently but also in a more responsible and environmentally-friendly manner.



QUALITY
MANAGEMENT

REDUCED ECOLOGICAL FOOTPRINT



PRODUCTION

85 – 95%
RECYCLED PLASTIC



PACKAGING

100%
PLASTIC-FREE



LOGISTICS

LESS PACKAGING
– MORE SPACE



SERVICE

DON'T BIN IT
– REPAIR IT!



CERTIFIED
DESIGN AND QUALITY
SINCE 1993




Laserliner – UMAREX Headquarters in Arnsberg


CONTENTS

	 <p>Universal lasers – Wall and floor lasers</p>	5	 <p>Electronic scanners – Stud, metal and power cable locating</p>	18
	 <p>Cross-line lasers – Compact lasers</p>	6	 <p>Humidity measuring devices – Humidity and condensation</p>	20
	 <p>Line lasers – 360° line lasers – 3D line lasers – Laser receivers</p>	8	 <p>Moisture measuring devices – Surface moisture measurement – Push-in moisture measurement</p>	21
	 <p>Hybrid and rotary lasers – Sets for medium ranges</p>	11	 <p>Temperature measuring instruments – Contact and ambient temperature measurement – Infrared temperature measurement</p>	23
	 <p>Distance meters – Laser distance meters – Distance measuring wheels – Digital caliper gauge</p>	12	 <p>Electrical meters – Battery, phase and voltage testers – Multimeters – Cable checkers</p>	24
	 <p>Slope indicators – Digital spirit levels – Angle measurement</p>	15	 <p>Accessories for laser measuring devices and more... – Tripods – Fasteners – LPG gas level check</p>	28
	 <p>Video inspection – Video endoscopes</p>	16	 <p>BBQ, kitchen and outdoor – Temperature measuring devices – Professional barbecue lighting – Wood moisture measuring device – Level measuring device</p>	30


Powerful technology. Convincing. Professional. Innovative.



Red laser with 635 / 650 nm laser have a large temperature range in which they operate reliably. Visibility is limited to indoor area applications.



Green looks 6 times brighter than red. This makes possible applications on dark surfaces, over long distances and working even in very bright ambient light conditions. A red laser with a wavelength of 635 nm is used as reference for the difference in brightness.



Automatic alignment of the device with a magnetically dampened pendulum system. The devices are set to their initial position and align themselves automatically in a matter of seconds.



Extremely bright green laser technology achieves high-quality lines: precise, clear and therefore easily visible.



Auto-Calibration: adjusts the device to different surfaces immediately after switching on.

Auto-Cal Plus: allows objects to be localized easily in Metal-Scan mode.



Electronic anti-glare system – 3x faster than conventional devices with mechanical systems.



Audible warning or test signal



Electronic vials and positioning motors controlled by temperaturestable sensors for automatic alignment of devices. The devices are set to their initial position and align themselves automatically.



The laser beam is aimed exactly at the tip of a precisely sharpened cone and is deflected from the reflective surface in a circular manner. This creates a highly accurate continuous, circumferential 360° laser line.



For many measuring tools, the key to optimum working is magnetic adhesion.



Short measuring times thanks to tried and tested high-speed sensor technology



High-quality laser diodes generate extremely bright and highly visible laser lines. This enables large working ranges of up to 55m with an ambient light with a maximum lighting intensity of 300 Lux.



Laser class 2:
Due to the blink reflex, the eye closes within 0.25 seconds preventing damage.



Digital data transfer



Infrared remote operation



Info

The QR codes on the products take you directly to the respective product website with further product information, applications and videos.

Laserliner instruments are available in sturdy carrying bags or hard-shell cases.



SOFT: softbag



HARD: plastic carry case

Laser receiver – ideal for outdoor applications



max. 30 m



Red and green line and cross-line lasers are suitable for tricky conditions.

The laser lines pulsate at a high frequency and this can be picked up by special laser receivers over long distances.

UNIVERSAL LASERS

■ Wall and floor lasers

LaserCube



Info



Practical line laser for quick alignment work on the ground or walls

- Accuracy 1mm / m
- Clean application on all surfaces – also when using pins
- Easy alignment using vials – horizontal and vertical
- Can be used as a laser spirit level
- Allows for measurement of sloped planes
- Compact thanks to mini cube housing

Inclusive: LaserCube, pins, batteries

ORDER NO. PU

081.108E 5



LaserCube Green



Info



LI-ION
BATTERY PACK

Practical green line laser for quick alignment work on the ground or walls

- Product description same as LaserCube
- Extremely bright green laser line
- Rechargeable via USB cable

Inclusive: LaserCube Green, pins, USB-A to USB-C cable

ORDER NO. PU

081.109E 5



SuperLine 2D



Info



Line laser for aligning work on all surfaces

- Accuracy 1mm / m
- Clean application on all surfaces – also when using pins
- The rotatable angle scale means that the device and the graduated collar can be set separately to any angle
- Powerful adhesion magnets
- Illuminated vial

Inclusive: SuperLine 2D, pins, batteries

ORDER NO. PU

081.110E 5



HandyLaser Plus



Info



Compact universal laser spirit level

- Vertical levelling by deflecting the laser line through 90° with a beam splitter
- With high-precision prism
- Combines the advantages of a laser spirit level in outstandingly compact dimensions
- Location with spring clips or powerful adhesion magnets
- Horizontal and vertical vial
- Vial accuracy 0.5mm / m

Inclusive: HandyLaser Plus, adjustable feet, 90° beam splitter, batteries

ORDER NO. PU

025.04.00E 5



SuperSquare-Laser 4



Info



90° line laser – ideal for laying wall and floor tiles

- Angle accuracy 0.5mm / m
- 4 clearly visible laser lines for aligning tiles
- Vertical and horizontal levelling on walls
- The applied lay edges and contact surface make it easy to position floor tiles.
- Clean application on all surfaces – also when using pins
- Bubble levels to adjust the device
- Can be used as a laser spirit level


Inclusive: SuperSquare-Laser 4, pins, batteries

ORDER NO. PU

081.134E 5



SuperSquare-Laser 2G



Info



Green 90° line laser – ideal for laying wall and floor tiles

- Product description same as SuperSquare-Laser 4
- 2 extremely bright green laser lines: precise, clear and therefore easily visible

Inclusive: SuperSquare-Laser 2G, pins, batteries

ORDER NO. PU

081.137E 5



CROSS-LINE LASERS

■ Compact lasers



* Approx. 6 times brighter than a typical red 630 - 660 nm laser



EasyCross-Laser Green set



Info

Green cross-line laser with wall/tripod bracket for height transmission and alignment

- Extremely bright green laser cross at the front achieves high-quality lines: precise, clear and therefore easily visible.
- 3° self-levelling range, accuracy 0.5mm/m
- Additional slope function for aligning inclines
- Out-Of-Level is indicated by optical signals when the unit is out of its self-levelling range.
- The device's tripod mount and wall bracket means that it can be mounted on a tripod or attached directly to the wall.
- Green laser technology with 0°C...50°C temperature range



Inclusive: EasyCross-Laser Green, wall/tripod bracket, batteries

ORDER NO. PU
081.081E 5



4 021563 730391



EasyCross-Laser Work set




Info

Green cross-line laser with crank tripod VarioStand 45cm

- Product description same as EasyCross-Laser Green set without wall/tripod bracket

VarioStand 45cm

- Product description same as on page 28



Inclusive: EasyCross-Laser Green, VarioStand 45 cm, batteries

ORDER NO. PU
081.082E 5



4 021563 730407



SmartCross-Laser X



Info

Compact cross-line laser

- 4° self-levelling range, accuracy 0.3 mm / m
- Additional slope function for aligning inclines
- Out-Of-Level is indicated by optical signals when the unit is out of its self-levelling range
- The laser receiver RX 30, which is available as an optional extra, can detect laser lines in a range of up to 30 m – ideal for outdoor applications.



Inclusive: SmartCross-Laser X, batteries

ORDER NO. PU
036.735E 5



4 021563 731831



SmartCross-Laser GX



Info

Compact green cross-line laser

- Product description same as SmartCross-Laser X
- Extremely bright green laser cross at the front achieves high-quality lines: precise, clear and therefore easily visible.
- The laser receiver GRX 30, which is available as an optional extra, can detect laser lines in a range of up to 30 m – ideal for outdoor applications.
- Green laser technology with 0°C...50°C temperature range



Inclusive: SmartCross-Laser GX, batteries

ORDER NO. PU
036.730E 5



4 021563 731503



COMPACT LASERS

SmartCross-Laser GX set



Info



Compact green cross-line laser with clamping bracket
– Product description same as SmartCross-Laser GX

- Clamping bracket**
- Easy-to-adjust clamping bracket
 - Versatile damage free mounting options for surfaces
 - Height and position of the measuring device easily adjustable
 - With base

Inclusive: SmartCross-Laser GX, clamping bracket, batteries

ORDER NO. PU

036.731E 5



4 021563 731794



SmartCross-Laser GX Plus set



Info



Compact green cross-line laser with wall / tripod bracket
– Product description same as SmartCross-Laser GX

- The device's tripod mount and wall bracket means that it can be mounted on a tripod or attached directly to the wall.

Inclusive: SmartCross-Laser GX, wall/tripod bracket, batteries

ORDER NO. PU

036.732E 2



4 021563 731800



SmartCross-Laser GX Work set




Info



Compact green cross-line laser with FixPod 50 cm
– Product description same as SmartCross-Laser GX

- FixPod 50 cm**
- 3-way tripod head
 - Telescopic tripod legs
 - Rubber-steel tips for use on different surfaces



Inclusive: SmartCross-Laser GX, FixPod 50 cm, batteries

ORDER NO. PU

036.733E 2



4 021563 731817



SmartCross-Laser GX set 150 cm




Info



Compact green cross-line laser with compact tripod 150 cm
– Product description same as SmartCross-Laser GX

- Compact tripod 150 cm**
- Crank tripod of aluminium



Inclusive: SmartCross-Laser GX, compact camera tripod 150 cm, batteries

ORDER NO. PU

036.734E 2



4 021563 731824



SmartCross-Laser GX set 300 cm



Info



Compact green cross-line laser with Clamping bracket and telescopic stand TelePod 300 cm
– Product description same as SmartCross-Laser GX

- Clamping bracket**
- Product description same as SmartCross-Laser GX Set

- TelePod 300 cm**
- High-quality aluminium telescopic stand, ideal for quick changes in applications where working positions vary
 - The stand is clamped between floor and ceiling then the laser measuring tool is turned manually to set it to the correct height ready for operation.
 - 4-piece design for easy transport
 - Height approx. 300 cm

Inclusive: SmartCross-Laser GX, clamping bracket, TelePod 300 cm incl. softbag, batteries

ORDER NO. PU

036.736E 2



4 021563 733910



LINE LASERS

- 360° line lasers
- 3D line lasers
- Laser receivers



**HIGH
VISIBILITY**

* Approx. 6 times brighter than a typical red 630 - 660nm laser



SmartLine-Laser G360



Info

Green automatic laser with horizontal 360° laser circle

- The horizontal laser line creates a closed 360° laser line, and the vertical laser line is perpendicular to it.
- Extremely bright green laser cross at the front achieves high-quality lines: precise, clear and therefore easily visible.
- 4° self-levelling range, accuracy 0.3mm / m
- Additional slope function for aligning inclines
- Individually switchable laser
- The device's tripod mount and wall bracket means that it can be mounted on a tripod or attached directly to the wall.
- The laser receiver GRX 30, which is available as an optional extra, can detect laser lines in a range of up to 30 m – ideal for outdoor applications.
- Green laser technology with 0°C...50°C temperature range



Inclusive: SmartLine-Laser G360, wall/tripod bracket, softbag, batteries

ORDER NO.	PU
081.190E	2



* Approx. 6 times brighter than a typical red 630 - 660 nm laser



SmartLine-Laser G360 set 150 cm

NEW



Info

Automatic cross-line laser with laser receiver RangeXtender G 40 and compact tripod 150cm

- The horizontal laser line creates a closed 360° laser line, and the vertical laser line is perpendicular to it.
- 4° self-levelling range, accuracy 0.3 mm / m
- Additional slope function for aligning inclines
- Individually switchable laser
- The laser receiver RangeXtender G 40 can detect laser lines in a range of up to 30m – ideal for outdoor applications.

RangeXtender G 40


- Laser receiver range up to 40m radius

Compact tripod 150cm

- Crank tripod of aluminium



RANGEXTENDER G 40
max. 40 m



Inclusive: SmartLine-Laser G360, RangeXtender G 40, compact tripod 150 cm, softbags, batteries

ORDER NO.	PU
081.118E	2



Accessories


for laser measuring devices on page 28 and 29

- Tripods
- Fasteners
- ...and more




LINE AND 3D LINE LASERS

CompactLine-Laser G360 set

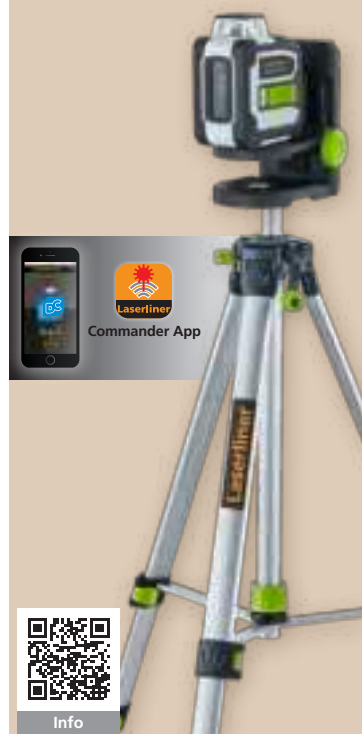

Green automatic laser with horizontal 360° laser circle, Digital Connection-interface and compact tripod 150cm

- The horizontal laser line creates a closed 360° laser line, and the vertical laser line is perpendicular to it.
- Extremely bright green laser cross at the front achieves high-quality lines: precise, clear and therefore easily visible.
- 3° self-levelling range, accuracy 0.4mm / m
- Additional slope function for aligning inclines
- Digital Connection interface with remote control
- Individually switchable laser
- Effective protection against measurement errors through tilt function
- The device's tripod mount and wall bracket means that it can be mounted on a tripod or attached directly to the wall.
- The laser receiver GRX 30, which is available as an optional extra, can detect laser lines in a range of up to 30m – ideal for outdoor applications.
- Green laser technology with 0°C...50°C temperature range




Inclusive: CompactLine-Laser G360, wall/tripod bracket, compact tripod 150cm, softbags, batteries

ORDER NO. PU
036.162E 2




CompactPlane-Laser 3G set 150 cm

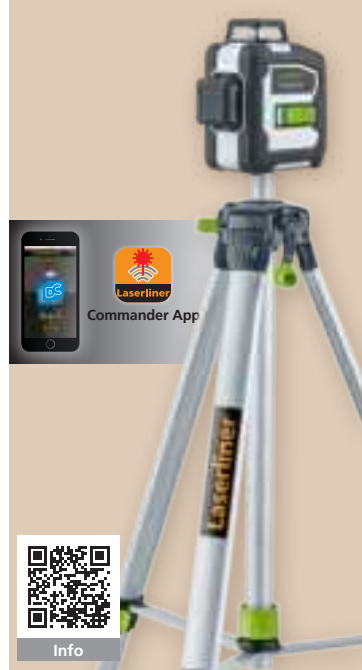


Green three-dimensional laser with a horizontal and two vertical 360° laser circles, Digital Connection-interface and compact tripod 150cm

- Horizontal and vertical 360° laser lines with green laser technology achieve high quality lines: precise, clear and therefore easily visible.
- Straight forward plumb function using laser crosses
- 3° self-levelling range, accuracy 0.35mm / m
- Additional slope function for aligning inclines
- Digital Connection interface with remote control
- Individually switchable laser
- Effective protection against measurement errors through tilt function
- Out-Of-Level is indicated by optical signals when the unit is out of its self-levelling range
- The laser receiver GRX 30, which is available as an optional extra, can detect laser lines in a range of up to 30m – ideal for outdoor applications.
- Green laser technology with 0°C...50°C temperature range



HIGH CAPACITY PACK



Inclusive: CompactPlane-Laser 3G, Li-Ion battery pack, USB-C-cable, compact tripod 150cm, softbags


ORDER NO. PU
036.299E 1



FREE
Commander app for remote operation of Laserliner measuring technology



- Remote control of the measuring device at inaccessible locations
- Individual choice of laser
- Set laser brightness
- Device protection against vibration (TILT mode)
- Standby and hand-held receiver mode on/off switch

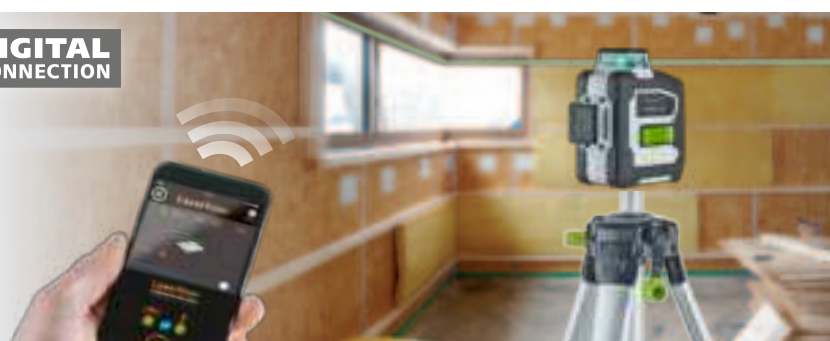

LASER RECEIVERS

RangeXtender 30

max.
30 m



Info

Laser receiver for all line lasers with RX-READY technology

- Fast alignment work in close and long distance
- RX-READY: The laser receiver allows to detect pulsating laser lines up to a distance of 30m away.
- The universal mount enables the device to be attached to levelling staffs.
- Integrated head magnet

Not suitable for green lasers.

Inclusive: universal mount, battery

ORDER NO. PU

033.25A 5



4 021563 672394



RangeXtender G30

max.
30 m



Info

Laser receiver for all line lasers with GRX-READY technology

- Product description same as RangeXtender 30
- GRX-READY: The laser receiver allows to detect pulsating laser lines up to a distance of 30 m away.

Not suitable for red lasers.

Inclusive: universal mount, battery

ORDER NO. PU

033.26E 5



4 021563 732470



**Laser receiver –
ideal for outdoor applications**



Red and green line and cross-line lasers are suitable for tricky conditions.

The laser lines pulsate at a high frequency and this can be picked up by special laser receivers over long distances.

HYBRID AND ROTARY LASERS

■ Sets for medium ranges



Duraplane 360 set 175 cm



Robust horizontal 360° line laser with anti-drift system, laser receiver RangeXtender 60, compact tripod 175cm and telescopic levelling staff 3m

- The horizontal laser line generates an extremely bright closed 360° laser circle with 2 brightness levels
- Optimised for work close to the ceiling
- 3.5° self-levelling range, accuracy 0.2mm / m
- Additional slope function for aligning inclines
- Ideal for mounting on drywall construction profiles
- Long-lasting, powerful rechargeable lithium-ion battery
- Power supply/battery charger for continuous operation

RangeXtender 60



– Laser receiver range up to 60m radius

Compact tripod 175cm

– Crank tripod of aluminium
– 5/8" thread adapter

Telescopic levelling staff 3m

– Easily legible, highly stable levelling staffs for use even under extreme conditions



RANGEXTENDER 60
max. 60 m



Inclusive: Duraplane 360, RangeXtender 60, universal mount, Li-Ion battery pack, power supply/battery charger incl. international adapter, compact tripod 175cm, 5/8" thread adapter, telescopic levelling staff 3 m, carrying case

ORDER NO. PU

052.500A 1



4 021563 709328



2 IN 1 HYBRID LASER

Hybrid laser Duraplane 360

Combination of rotary and line laser function. For indoor and outdoor applications.

- Laser booster: doubles visibility without a receiver
- ADS Tilt prevents incorrect measurements of the reference height in the event of vibrations
- With battery status indicator



Receiver mode

Use of the 360° laser line in outdoor areas with RX technology. The laser line is detected with a laser receiver on long distances. Working range max. 120 m



Without receiver mode

Visibility becomes constantly brighter for unfavourable lighting conditions e.g. in indoor finishing work

Cubus 110 S set 150 cm

NEW



Fully automatic rotary laser with laser receiver SensoLite 110, lightweight tripod 150cm, telescopic levelling staff LT 4m and snap-on stand/wall bracket

- 4° self-levelling range, accuracy 0.15mm / m
- Laser modes: spot, scan, rotary and hand receiver mode
- Slope function
- All functions of the rotary laser can be controlled with the remote control from up to 40m.
- The additional reference beam makes alignment of partitions easier.
- Work efficiently and charge the battery at the same time

SensoLite 110 set



– Laser receiver range up to 100m radius

Lightweight tripod 150cm

– Lightweight design with milled mounting surface

Telescopic levelling staff LT 4m

– Made of strong aluminium section
– Maximum height of 4 meters



SENSOLITE 110
max. 100 m



Inclusive: Cubus, SensoLite 110, lightweight tripod 150cm, stand/wall bracket, universal mount, telescopic levelling staff LT 4m, remote control, Li-Ion battery pack, batteries, power supply/battery charger incl. international adapter, carrying strap, carrying case

ORDER NO. PU

052.325A 1




4 021563 731985



DISTANCE METERS

- Laser distance meters
- Distance measuring wheels
- Digital caliper gauge

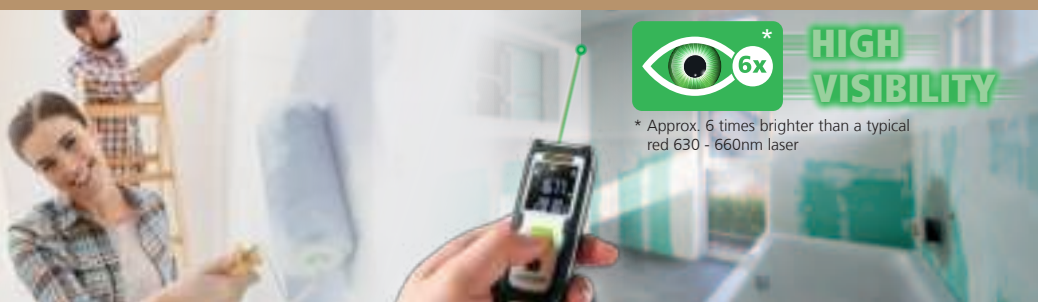

* Approx. 6 times brighter than a typical red 630 - 660nm laser

DistanceCheck 25




Info

Laser distance meter – simple operating techniques

- Measuring range, internal 0.05 to 30 m*
- Measuring precision of ± 2 mm (typical)*
- The area and volume functions permit the acquisition of room sizes, for example to calculate material quantities
- Min. continuous measurement
- Illuminated 2-line VTN display

* See operating instructions for specific measuring ranges and accuracies



Inclusive: DistanceCheck, batteries

ORDER NO. PU

080.805E 5



4 021563 731770



LaserRange-Master i3




Info

Laser distance meter – simple operating techniques

- Measuring range, internal 0.3 to 30 m*
- Measuring precision of ± 2 mm (typical)*
- The area and volume functions permit the acquisition of room sizes, for example to calculate material quantities
- Min./Max. continuous measurement
- Illuminated 2-line VTN display
- Sturdy, ergonomically designed housing

* See operating instructions for specific measuring ranges and accuracies



Inclusive: LaserRange-Master i3, softbag, batteries

ORDER NO. PU

080.830E 5



4 021563 732104



LaserRange-Master Gi4




Info

Laser distance meter with green laser technology

- Product description same as LaserRange-Master i3
- Measuring range, internal 0.3 to 40 m*

* See operating instructions for specific measuring ranges and accuracies




Inclusive: LaserRange-Master Gi4, softbag, batteries

ORDER NO. PU

080.833E 5



4 021563 732128



LaserRange-Master i5




Info

Laser distance meter with angle function

- Measuring range, internal 0.05 to 50 m*
- Measuring precision of ± 1.5 mm (typical)*
- The area and volume functions permit the acquisition of room sizes, for example to calculate material quantities
- Angle function 1 + 2 + 3**
- Min./Max. continuous measurement
- Digital bubble level is used to align the measuring device
- Tilt sensor calibration
- 360° inclination sensor for determining the horizontal and vertical distance
- Illuminated 4-line colour LC display
- Sturdy, ergonomically designed housing

* See operating instructions for specific measuring ranges and accuracies

** In combination with 360° inclination sensor



Inclusive: LaserRange-Master i5, softbag, batteries

ORDER NO. PU

080.835E 5



4 021563 732111



DISTANCE METERS

DistanceMaster Compact 30

NEW




Info



Compact, user-friendly laser rangefinder

- Measuring range, internal 0,1 to 30 m*
- Measuring precision of ± 2 mm (typical)*
- Point-precise laser measurement for determining lengths, areas and volumes
- Continuous measurement with Min/Max display
- Measuring points: front and rear
- Extremely easy to use due to compact design
- Effective saving of measured values through memory function with 50 memory locations
- Energy-saving Auto Off function when not in use

* See operating instructions for specific measuring ranges and accuracies




Inclusive: DistanceMaster Compact 30, softbag, batteries

ORDER NO. PU
080.940E 5



DistanceMaster Compact Plus 50

NEW




Info



Handy laser rangefinder that is easy to operate with digital connection

- Measuring range, internal 0,1 to 50 m*
- Measuring precision of ± 2 mm (typical)*
- Point-precise laser measurement for determining lengths, areas and volumes
- Continuous measurement with Min/Max display
- Optimum project documentation: Easy transfer of measurement data to mobile devices via the digital connection
- Measuring points: front and rear
- Extremely easy to use due to compact design
- Effective saving of measured values through memory function with 50 memory locations
- Energy-saving Auto Off function when not in use

* See operating instructions for specific measuring ranges and accuracies



Inclusive: DistanceMaster Compact Plus 50, softbag, batteries

ORDER NO. PU
080.942E 5



DistanceMaster 40

NEW




Info



Laser rangefinder with Pythagoras angle function

- Measuring range, internal 0,1 to 40 m*
- Measuring precision of $\pm 1,5$ mm (typical)*
- Simple measurement, addition and subtraction of lengths, areas and volumes
- Indirect determination of height in hard to reach locations using Pythagoras function (1 + 2 + 3)
- Continuous measurement with Min/Max display
- Robust, dustproof and waterproof
- Front, back or tripod housing reference point options
- Effective saving of measured values through memory function with 50 memory locations
- Energy-saving Auto Off function when not in use

* See operating instructions for specific measuring ranges and accuracies




Inclusive: DistanceMaster 40, softbag, batteries

ORDER NO. PU
080.981E 5



DistanceMaster Plus 80

NEW





Info



Laser rangefinder with angle function and Digital Connection

- Measuring range, internal 0,1 to 80 m*
- Measuring precision of $\pm 1,5$ mm (typical)*
- Simple measurement, addition and subtraction of lengths, areas and volumes
- Indirect determination of height in hard to reach locations using angle function (1 + 2 + 3)
- Automatic addition of wall surfaces with the same height, ideal for painting work
- Continuous measurement with Min/Max display
- Exact alignment of the measuring instrument through digital spirit level
- Robust, dustproof and waterproof
- Optimum project documentation: Easy transfer of measurement data to mobile devices via the Digital Connection
- Rechargeable via USB-C cable

* See operating instructions for specific measuring ranges and accuracies



Inclusive: DistanceMaster Plus 80, softbag, Li-Ion battery

ORDER NO. PU
080.984E 5




Free – MeasureNote App

Measurement and documentation app
Manage measuring technology intelligently – Multifunctional app for Laserliner measuring technology with Digital Connection. Make and save notes on site.



Data management made simple.
Digital Connection interface for fast data transfer.

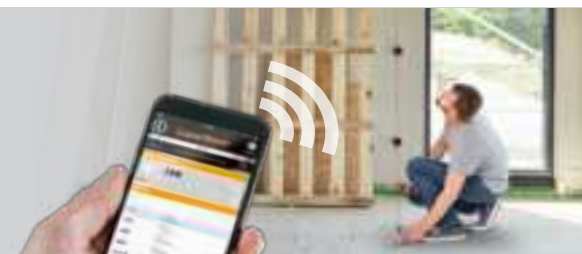

DISTANCE MEASURING WHEELS AND DIGITAL CALIPER GAUGE

RollPilot Mini



Info



Measuring wheel

- Mechanical measuring wheel: Distances up to 9,999.9 m
- Addition when wheels are turning forwards and subtraction when backwards
- Wall-to-wall function: The compact design enables direct measurement from wall to wall.
- The moving pointer shows the exact start and end positions.
- The telescopic handle makes the device easy to carry
- With fold-in stand
- Accuracy $\pm 0.1\%$
- Metering wheel with 0.5 m circumference



Inclusive: RollPilot Mini

ORDER NO. PU

075.002E 2



4 021563 735990



RollPilot S12



Info



Measuring wheel for use on straight lines and curves

- This mechanical metering wheel delivers accurate measured values at all ranges up to 9,999.9 m.
- Large, easy to read display with additional fine scale (1 - 9 cm) for precise measurement.
- Addition when wheels are turning forwards and subtraction when backwards
- The moving pointer shows the exact start and end positions.
- Folding design and softbag for easy transport
- Brake and zero setting directly on handle
- Non-wearing cardanic scale drive
- Accuracy $\pm 0.1\%$
- Metering wheel with 1 m circumference



Foldable for easy transport



Inclusive: RollPilot S12, softbag

ORDER NO. PU


075.005E 2



4 021563 736003



MetricMaster Plus

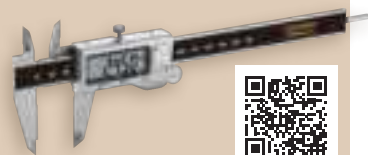

Info

Digital caliper gauge for precise measurement of lengths

- Measuring range 0...150 mm
- Measuring precision ± 0.03 mm
- External-, internal-, depth -, differential measurement through zero position and level measurement
- 5-digit LC display
- Fixation of the determined measuring range by means of clamping screw
- Exact sliding mechanism through a fine adjustment wheel
- Zero setting at any position

Inclusive: MetricMaster Plus, carrying case, battery, screwdriver

ORDER NO. PU

075.510E 5



4 021563 738427



1x LR44 1.55 V


HARD

SLOPE INDICATORS

- Digital spirit levels
- Angle measurement



DigiLevel Plus




Digital electronic spirit levels – precise and easy to use

- An acoustic signal is sounded at 0°, 45°, 90°, 135° and 180° as an aid to ease the alignment of objects.
- Angles can be transferred in reference mode.
- The flip-display feature changes the display automatically when making overhead measurements.
- Calibration function to recalibrate the sensor and increase the measuring accuracy
- Powerful adhesion magnets, milled measuring surface, additional vertical and horizontal vial
- Hold function

DigiLevel Plus 25 / 40 / 60
Length 25 / 40 / 60 cm

Angle display:	360° (4 x 90°)
Accuracy of electronic measurements:	± 0,1° from 0°... 1° ± 0,1° from 89°...90° ± 0,2° from 1°...89°
Vial precision:	± 1 mm/m

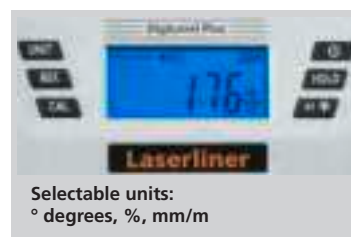

Selectable units:
° degrees, %, mm/m

Inclusive: DigiLevel Plus,
softbag, batteries

	ORDER NO.	PU	
25 cm	081.249E	2	4 021563 736072
40 cm	081.250E	2	4 021563 736089
60 cm	081.251E	2	4 021563 736096



MasterLevel Box



Practical, digital slope indicator

- Angles can be transferred in reference mode.
- The flip-display feature changes the display automatically when making overhead measurements.
- Calibration function to recalibrate the sensor and increase the measuring accuracy
- Powerful adhesion magnets
- Hold function
- Compact in mini format

Angle display:	360° (4 x 90°)
Accuracy of electronic measurements:	± 0,2° from 0°...90°

Inclusive: MasterLevel Box,
softbag, battery

ORDER NO.	PU	
081.260E	5	4 021563 735075



VIDEO INSPECTION

■ Video endoscopes



VideoScope Micro



Info



Practical video inspection system for video inspection of areas that hard to reach – perfect for extremely small openings

- Small camera head, ideal for places that are hard to reach
- Powerful object lighting thanks to 6 high-performance LEDs
- Resistant to petrol and diesel
- 2x digital zoom in 50% increments
- Illumination: 5 brightness levels
- DOF: Focal depth 3...8 cm
- Image rotation and mirroring
- Screen size: 2.4"
- Camera head: ø 5.5 mm
- TopClips: Hook, magnet and mirror attachments for fixing on the camera head



1 m
DOF 2...8 cm

Inclusive: VideoPocket Micro 1 m, TopClips, batteries

ORDER NO. PU

082.259E 2



4 021563 732463



CAMERA

640 x 480 pixel



DISPLAY

320 x 240 pixel



ZOOM 1-2x

4x AA

TopClips

Hook, magnet and mirror attachments for fixing on the camera head

Hook-/ magnet attachment

Pull/lift difficult to reach objects

Mirror attachment

Mirror allows objects to be viewed at 90° angle

STORAGE



VideoPocket



Info



Handy inspection camera with large display with optimum legibility

- Identify specific differences with the compare image function
- REC-Function: still picture and video can be recorded for a later analysis
- Evaluation and documentation using internal photo memory, micro SD card and USB interface
- Powerful object lighting thanks to 6 high-performance LEDs
- 2x digital zoom in 25% increments
- Illumination: 10 brightness levels
- DOF: Focal depth 3...8 cm
- Image rotation and mirroring
- Screen size: 4.3"
- Camera head: ø 8 mm
- TopClips: Hook, magnet and mirror attachments for fixing on the camera head



1 m
DOF 3...8 cm

Inclusive: VideoPocket 1 m, softbag, TopClips, batteries

ORDER NO. PU

082.261E 2



4 021563 735174



CAMERA

640 x 480 pixel



DISPLAY

480 x 272 pixel



ZOOM 2x

REC



4x AA

SOFT

TopClips

Hook, magnet and mirror attachments for fixing on the camera head



VIDEO INSPECTION

VideoScope One



Compact inspection camera for visual inspections of areas which are difficult to access

- Powerful object lighting thanks to 4 high-performance LEDs
- 2x digital zoom in 10% increments
- DOF: Focal depth 3...7 cm
- Connection of external monitors via TV Out
- Image rotation and mirroring
- Camera head: ø 9 mm

TopClips

Hook, magnet and mirror attachments for fixing on the camera head



Inclusive: VideoScope One 1.5 m, TopClips, batteries

ORDER NO. PU

082.252E 2



CAMERA

320 x 240 pixel



IP 68

DISPLAY

320 x 240 pixel

2,7" LCD



ZOOM 2x

VIDEO OUT

4x AA

VideoScope XL




Compact inspection camera for visual inspections of areas which are difficult to access

- Powerful object lighting thanks to 4 high-performance LEDs
- 2x digital zoom in 20% increments
- DOF: Focal depth 3...7 cm
- Image rotation and mirroring
- Camera head: ø 9 mm

TopClips

Hook, magnet and mirror attachments for fixing on the camera head



Inclusive: VideoScope XL 3.5 m, TopClips, batteries

ORDER NO. PU

082.114E 2



CAMERA

640 x 480 pixel



IP 68

DISPLAY

320 x 240 pixel

3,5" LCD



ZOOM 2x

VIDEO OUT

4x AA

VideoScope XXL




Compact inspection camera with featuring record function

- REC-Function: still picture and video can be recorded for a later analysis
- Direct data transfer to PC
- Powerful object lighting thanks to 4 high-performance LEDs
- 1.5x digital zoom in 10% increments
- DOF: Focal depth 1...6 cm
- Connection of external monitors via TV Out
- Image rotation and mirroring
- Camera head: ø 9 mm

TopClips

Hook, magnet and mirror attachments for fixing on the camera head



Inclusive: VideoScope XXL 5 m, USB/REC cable, micro-SD card, TopClips, batteries

ORDER NO. PU

082.115E 2



CAMERA

640 x 480 pixel



IP 68

DISPLAY

320 x 240 pixel

3,5" LCD



ZOOM 1,5x

REC

micro-SD

MICRO USB

VIDEO OUT

4x AA

ELECTRONIC SCANNERS

- Stud, metal and power cable locating




StarFinder



Info

Electronic detector for live supply lines as well as wall beams and joists in drywall structures

- One-button operation to switch between the different measurement modes
- Auto-Calibration: adjusts the device to different surfaces immediately after switching on.
- Acoustic and visual detection signals for finding objects.
- High safety is guaranteed by the permanent voltage warning function.



Inclusive: StarFinder, battery

ORDER NO.	PU
080.969E	5



4 021563 730551




StarFinder Plus



Info

Electronic detector for live supply lines as well as wall beams and joists in drywall structures

- Product description same as StarFinder
- The user guide on the LC display makes the device easy and reliable to use.
- Illuminated display



Inclusive: StarFinder Plus, battery

ORDER NO.	PU
080.972E	5



4 021563 730568




CombiFinder Plus



Info

Electronic detector for metal and live wires

- This device permits targeted scanning for metals such as reinforcing iron, heating pipes and water pipes.
- One-button operation to switch between the different measurement modes
- The user guide on the LC display makes the device easy and reliable to use.
- Auto-Calibration: adjusts the device to different surfaces immediately after switching on.
- Auto-Cal Plus: allows objects to be localized easily in Metal-Scan mode.
- Acoustic and visual detection signals for finding objects.
- High safety is guaranteed by the permanent voltage warning function.
- Illuminated display



Inclusive: CombiFinder Plus, battery

ORDER NO.	PU
080.955E	5



4 021563 730544




MultiFinder Plus



Info

Universal detector for locating wood, metal, copper, iron and live wires

- One-button operation to switch between the different measurement modes
- The user guide on the LC display makes the device easy and reliable to use.
- Auto-Calibration: adjusts the device to different surfaces immediately after switching on.
- Auto-Cal Plus: allows objects to be localized easily in Metal-Scan mode.
- Acoustic and visual detection signals for finding objects.
- High safety is guaranteed by the permanent voltage warning function.
- Special feature: in metal mode, it is even able to detect concealed lines when they are not live.
- Illuminated display



Inclusive: MultiFinder Plus, battery

ORDER NO.	PU
080.965E	5



4 021563 730575



ELECTRONIC SCANNERS


StarSensor 50



Info

Electronic detector for live supply lines as well as wall beams and joists in drywall structures

- Suitable for beam and metal detection
- One-button operation to switch between the different measurement modes
- No calibration required
- High accuracy due to 5 sensors
- Simultaneous detection of the centre and edges of the object
- Clearly visible LED indicator signals objects have been located
- Deep scan permanently switched on
- High safety is guaranteed by the permanent voltage warning function.
- Sturdy, ergonomically designed housing



Inclusive: StarSensor 50, batteries

ORDER NO. PU

080.976A 5



4 021563 719440



NO
CAL REQUIRED

2x
AA


StarSensor 150



Info

Electronic detector for live supply lines as well as wall beams and joists in drywall structures

- Suitable for beam and metal detection
- One-button operation to switch between the different measurement modes
- No calibration required
- Optimum accuracy due to 9 sensors
- Identification of single and double boarding
- Simultaneous detection of the centre and edges of the object
- Clearly visible LED indicator signals objects have been located
- Deep scan permanently switched on
- High safety is guaranteed by the permanent voltage warning function.
- Sturdy, ergonomically designed housing



Inclusive: StarSensor 150, batteries

ORDER NO. PU

080.977A 5



4 021563 719457



NO
CAL REQUIRED

2x
AAA

Professional technology



AUTO
CALIBRATION

Adjusts the device to different surfaces immediately after switching on.

AUTO
CAL PLUS

Allows objects to be localized easily in Metal-Scan mode.

NO
CAL REQUIRED



Switch on and direct start to metal and beams location.

HUMIDITY MEASURING DEVICES

■ Humidity and condensation

ClimaHome-Check



Digital temperature- and hygrometer

- Measurement of relative humidity and ambient temperature
- Can be used as tabletop device with fold-out stand/clip
- Integrated magnetic holder
- Digital display with max/min values
- Available in white or black

Ambient temperature: 0°C...50°C
Accuracy: ± 1°C (0°C...50°C), ± 2°C (<0°C and >50°C)
Air humidity (relative): 20%rH...95%rH
Accuracy: ± 3% (30%rH...70%rH)
± 5% (20%rH...30%rH, 70%rH...95%rH)

Inclusive: ClimaHome-Check, battery

	ORDER NO.	PU	
white	082.028E	5	4 021563 735150
black	082.428E	5	4 021563 735167

ClimaHome-Check Plus



Digital hygrometer for measurement of relative humidity and ambient temperature with ventilation recommendation

- Measurement of relative humidity and ambient temperature
- Visual and acoustic warning of high humidity and air dryness
- Ventilation recommendation to improve indoor climate
- With Timer function and time display
- Can be used as tabletop device with fold-out stand
- Integrated magnetic holder
- Digital display with max/min values

Ambient temperature: -9,9°C...50°C
Accuracy: ± 1°C
Air humidity (relative): 1%rH...99%rH
Accuracy: ± 3% (20%rH...80%rH),
± 5% (<20%rH and >80%rH)

Inclusive: ClimaHome-Check Plus, batteries

	ORDER NO.	PU	
	082.426E	5	4 021563 735693

ClimaPilot



Digital hygrometer for measurement of relative humidity and ambient temperature with dew point indicator

- Practical device for monitoring room climate
- Digital display with max./min. values
- Switch between ambient temperature/dew point

Ambient temperature: -10°C...50°C
Accuracy: ± 1°C
Air humidity (relative): 20%rH...90%rH
Accuracy: ± 5%rH (25%rH...85%rH)

Inclusive: ClimaPilot, battery

	ORDER NO.	PU	
	082.034E	5	4 021563 735181

CondenseSpot Plus



Infrared thermometer for locating thermal bridges and condensation moisture

- 8-point laser circle pinpoints the measuring zone exactly
- Measurement of surface/dew point temperature
- Localisation of condensation in thermal bridge mode with dew point display
- Localisation of thermal bridges and condensation water issues in thermal bridge mode with dew point display
- Temperature measurement range (-40°C...365°C)
- Emission ratio: 0.01...1.0 (adjustable)
- Colour alarm function: Thermal bridge warning with colour display
- Quick selection of 5 emissivity defaults with Fast Preset or exact setting by entering numerical value
- Bar graph condense water indicator
- Lens 12:1, illuminated display

Infrared temperature
Accuracy: -40°C...365°C
-40°C...0°C (± 1°C + 0,1°C/1°C))
0°C...30°C (± 1°C)
>30°C (± 2°C or ± 2%, depending on the higher value)
Ambient temperature: -20°C...65°C
Accuracy: ± 1°C (0°C...50°C)
± 2,5°C (<0°C and >50°C)
Air humidity (relative): 1%...99%
Accuracy: ± 3% (20%...80%)
± 5% (<20% and >80%)

Inclusive: CondenseSpot Plus, batteries

	ORDER NO.	PU	
	082.046E	2	4 021563 735761

MOISTURE MEASURING DEVICES

- Surface moisture measurement
- Push-in moisture measurement

MoistureFinder Compact



Info



Professional material moisture measurement – quick and non-destructive

- Non-destructive measurement of material moisture by capacitive measurement
- Select material type then place the instrument on the material's surface to determine moisture content in %.
- 4 selectable material characteristics: soft woods (e.g. spruce, pine, linden), hard woods (e.g. beech, oak, birch), gypsum plaster and cement screed
- LED wet/dry indicator provide immediate measurement results for moisture content.



Material moisture (capacitive)

Measuring range wood

Softwood:	6.7%...51.4%
Hardwood:	3.8%...31.6%
Accuracy (absolute):	± 2%

Measuring range building materials

Cement screed:	0%...5%
Plaster:	0%...23.5%
Accuracy (absolute):	± 0.2%

Inclusive: MoistureFinder Compact, battery

ORDER NO. **PU**

082.332E 5



4 021563 734856



DampFinder Compact



Info

Universal device for testing moisture in wood and building materials

- For measuring moisture in building materials and timber
- 2 wood groups with 102 types of wood, 8 building materials (aerated concrete, anhydrite screed, cement screed, chalky sandstone, concrete C12/15, concrete C20/25, concrete C30/37, gypsum plaster) and universal index mode
- Triple scale for wood groups A, B and universal index mode
- Numerical display of measured value and ambient temperature
- Stable, ergonomically designed, rubberised casing
- Illuminated, transparent display

4 x
AAA

Material moisture (resistive)

Accuracy (absolute):

Wood:	± 1% (5%...30%)
	± 2% (<5% and >30%)
Building materials:	± 0.15% (0%...10%)
	± 1% (>10%)

Inclusive: DampFinder Compact, protective cap with self-test function, battery

ORDER NO. **PU**

082.015A 5



4 021563 734849



Free – MeasureNote App Measurement and documentation app

Manage measuring technology intelligently – Multifunctional app for Laserliner measuring technology with Digital Connection. Make and save notes on site.



Data management made simple.
Digital Connection interface for fast data transfer.



MOISTURE MEASURING DEVICES

DampCheck



Info



Compact moisture measuring device

- Checks the degree of dryness in wood
- For checking the moisture content in gypsum plaster
- Measuring of ambient temperature
- LED wet/dry indicator: the 3 colour LEDs (green = dry, yellow = moist, red = wet) provide immediate information about the tested material's degree of moisture or dryness.



Material moisture (resistive)

Accuracy (absolute):

Wood: $\pm 2\%$

Building materials: $\pm 0.3\%$ Ambient temperature: $\pm 2^{\circ}\text{C}$ (0...40°C)

Inclusive: DampCheck, protective cap, batteries

ORDER NO. PU

082.003E 5



4 021563 734832



WoodTester Compact



Info



Compact wood moisture measuring device

- Checks the degree of dryness in firewood to conserve energy and reduce emissions
- Dual scale for most commonly used types of firewood RANGE, WOOD GROUP A (beech, linden, willow, ebony) RANGE, WOOD GROUP B (pedunculate oak, maple, alder, spruce, birch, ash)
- LED wet/dry indicator: the 12 colour LEDs (green = dry, yellow = moist, red = wet) provide immediate information about the tested material's degree of moisture or dryness.
- Simple one-button operation
- Stable, ergonomic housing



Material moisture (resistive)

Accuracy (absolute):

Wood: $\pm 2\%$

Inclusive: WoodTester Compact, protective cap with self-test function, battery

ORDER NO. PU

082.004E 5



4 021563 735822



DampFinder Home



Info



Universal device for testing moisture in wood and building materials

- For measuring moisture in building materials and timber
- 2 wood groups with 102 types of wood, 3 building materials and universal index mode (aerated concrete, cement screed, gypsum plaster)
- Auto-Hold function
- Stable, ergonomic housing
- Illuminated, transparent display



Material moisture (resistive)

Accuracy (absolute):

Wood: $\pm 1\%$ (5%...30%)

$\pm 2\%$ (<5% and >30%)

Building materials: $\pm 0.15\%$ (0%...10%)

$\pm 1\%$ (>10%)

Inclusive: DampFinder Home, protective cap with self-test function, battery

ORDER NO. PU

082.013E 5



4 021563 734825



TEMPERATURE MEASURING INSTRUMENTS

- Contact and ambient temperature measurement
- Infrared temperature measurement



ThermoTester



Info

Digital thermometer for household, gastronomy, trade, craft and industrial applications

- Can be dipped or inserted into material
- Large temperature measuring range: -40°C...250°C
- Quick response time
- Measurement in °C or °F
- Hold function: the current measured value is held in the display
- Digital display with max./min. values
- Large LC display

1x
LR 44

Measuring range: -40 °C...250 °C

Accuracy: 1.5% ± 2°C

Inclusive: ThermoTester, protective cap, batteries

ORDER NO. PU

082.030E 5



4 021563 735778



ThermoSpot Pocket



Info

Non-contact infrared temperature instrument with integrated laser

- The non-contact measuring method is ideal for sensitive surfaces and for hazardous applications such as moving machine parts or electrical installations
- Measuring range pinpointing with target laser
- Large measuring range: -40°C...400°C
- Max-Read: The highest measured value is shown on the display during measurement.
- Hold function: the current measured value is held in the display
- Emission ratio: 0.95
- Lens: 12:1
- Illuminated display



Infrared measuring range: -40°C...400°C
Accuracy: ± 2°C + 0.1°C / degree (-40°C...0°C)
± 2°C or ± 2% depending on the higher value (0°C...400°C)

Inclusive: ThermoSpot Pocket, battery

ORDER NO. PU

082.440E 5



4 021563 734863



ThermoSpot One



Info

Non-contact infrared temperature instrument with integrated laser

- The non-contact measuring method is ideal for sensitive surfaces and for hazardous applications such as moving machine parts or electrical installations
- Measuring range pinpointing with target laser
- Large measuring range: -38°C...365°C
- Max-Read: The highest measured value is shown on the display during measurement.
- Emission ratio: 0.95
- Lens: 12:1
- Illuminated display



Infrared measuring range: -38°C...365°C
Accuracy: ± 2.5°C + 0.05°C / degree (-38°C...0°C)
± 2.5°C or ± 2.5% depending on the higher value (0°C...365°C)

Inclusive: ThermoSpot One, battery

ORDER NO. PU

082.038E 5



4 021563 735082



ThermoSpot Laser



Info

Non-contact infrared temperature instrument with integrated laser

- Product description same as ThermoSpot One
- The 8-point laser circle pinpoints the measuring zone exactly



Inclusive: ThermoSpot Laser, battery

ORDER NO. PU

082.040E 5



4 021563 735099



ELECTRICAL METERS

- Battery, phase and voltage testers
- Multimeters
- Cable checkers

BatteryCheck



Info

Battery tester for checking battery charge level

- For checking all commonly used batteries (AA / AAA / C / D / E-block / button cell – small)
- Easy to read, 3-colour scale to display the battery charge level
- Easy to use with sliding battery holder and clearly accessible contacts
- Operates without batteries
- Small, compact design (fits in any toolbox)

Measuring range: 1.5 / 9.0 V

Inclusive: BatteryCheck

ORDER NO. PU

083.005E 5



4 021563 734870



PowerCheck



Info

Battery tester for checking battery and rechargeable battery charge level

- For checking all commonly used batteries and rechargeable batteries (e.g. AA / AAA / C / D / E-block / button cell – small/large)
- For checking various battery systems with one device: Alkali (AlMn), zinc carbon (ZnC), lithium (LiMnO₂), nickel metal hydride (NiMH)
- Charge level shown on LCD scale
- Small, compact design (fits in any toolbox)

Measuring range: 1.2 / 1.5 / 3.0 / 8.4 / 9.0 V

Inclusive: PowerCheck, battery

ORDER NO. PU

083.006E 5



4 021563 734887



1x
AAA

TipTest Duo set



Info

Phase tester for quickly checking the L-conductor at electrical connections

- Reliable and fast phase testing
- Simple and well-proven tool
- Compact design with convenient clip, practical for shirt pockets and tool boxes
- Two phase testers of different lengths

Measuring range: 50...250 V

Frequency range: 50...500 Hz

Inclusive: TipTest Duo

ORDER NO. PU

083.009E 5



4 021563 737413




max
250 V



VOLTAGE TESTERS

ActivePen

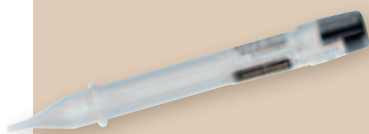

Info



Safe non-contact voltage check

- Locates electrical voltages in cables, sockets, bulb sockets and fuses
- Tracing live cables, e.g. at power sockets and terminals
- Finds breaks in wires and cables
- Clearly visible LED for signalling electrical voltages

Voltage range: 200...600 V/AC,

Frequency range: 50...60 Hz

Inclusive: ActivePen, batteries

ORDER NO. PU

083.007E 5



4 021563 735570

CAT III
600V

2x
AAA



ActiveFinder



Info



Contactless handy voltage tester – Work safely on electrical lines

- Locates electrical voltages in cables, sockets, bulb sockets and fuses
- Tracing live cables, e.g. at power sockets and terminals
- Finds breaks in wires and cables
- Extremely high sensitivity for tracing lines at great depths (Zoom)
- Clearly visible LED for signalling electrical voltages
- Integrated flashlight

Measuring range: 24...1000 V/AC

Frequency range: 50...60 Hz

Inclusive: ActiveFinder, batteries

ORDER NO. PU

083.010E 5



4 021563 735716

CAT III
1000V

AutoSound



2x
AAA



ActiveTester



Info

Universal voltage tester for the entire electrical system of buildings

- Reliable and fast voltage tester with the most commonly used nominal voltages
- Automatic AC voltage and DC voltage test
- Automatic range changeover
- Operates without batteries
- Rugged, practical enclosure in space-saving mini design

Voltage range: 12, 24, 36, 50, 120, 230, 400 V/AC
+/-12, 24, 36, 50, 120, 230, 400 V/DC

LED indicator: 12, 24, 36, 50, 120, 230, 400 V polarity plus/minus

Inclusive: ActiveTester, protective covers

ORDER NO. PU

083.020E 5



4 021563 735723

CAT III
400V

IP 64



ActiveMaster



Info

Reliable measuring device for testing voltage and continuity

- Voltage tester with the most commonly used nominal voltages
- Automatic AC voltage and DC voltage test
- Automatic range and function changeover
- Single-phase and rotary field test with phase sequence display
- Single-pole phase testing
- Safety self-test (AC warning) as from 50 V, operates in emergency mode without battery
- Rugged, practical enclosure with lockable test prod spacing (for standard EU connector)

Voltage range: 12, 24, 36, 50, 120, 230, 400, 690 V AC/DC

Peak current: Is < 3.5 mA

Inclusive: ActiveMaster, protective covers, batteries

ORDER NO. PU

083.021E 5



4 021563 735730

CAT II
1000V

CAT III
1000V

CAT IV
600V

AutoSound

IP 64

2x
AAA



MULTIMETERS AND CABLE CHECKERS

MultiMeter-Home



Info

Compact analogue multimeter for measuring tasks at home and for hobbies

- Precise voltage, current and resistance measurement
- Battery test function for measuring battery charge status
- Function and range changeover without reconnecting cables
- Large, easy-to-read analogue scale with zero point adjustment
- Compact casing with integrated test leads

Voltage range:	V/DC: 12...300 V, ± 5%
	V/AC: 60...300 V, ± 5%
Current range:	A/DC: 30...600 mA, ± 5%
Resistance range:	10 kΩ...1 MΩ, ± 5%

Inclusive: MultiMeter-Home, 2 test prods, batteries

ORDER NO. PU

083.030E 5



4 021563 735815



CAT III
300V

1x
AAA

MultiMeter



Info

Compact universal multimeter for all every day measuring tasks at home and for hobbies

- Precise voltage, current and resistance measurement
- Battery test function for measuring battery charge status and accus
- Diode test function for determining integrity and polarity
- Large, easy-to-read LC display

Voltage range:	V/DC: 0.2...200 V, ± 0.8%
	V/AC: 200...300 V, ± 1.2%
	V/AC: 300 V, ± 1%

Current range: A/DC: 2...20...200 mA / 10 A, ± 1.2% / 2%

Resistance range: 0.2 kΩ / 2...200 kΩ / 2 MΩ, ± 1% / 0.8% / 1.2%

Inclusive: MultiMeter, 2 test prods, batteries

ORDER NO. PU

083.031E 5



4 021563 735563



CAT III
300V

9V

MultiMeter-PocketBox



Info

Universal multimeter in practical box format with automatic range changeover

- Precise voltage, current and resistance measurement
- Automatic continuity tester
- Diode test function for determining integrity and polarity
- Automatic function and range changeover without reconnecting cables
- Easy-to-read LC display
- Hold function

Voltage range:	V/DC: 0.2...2...20 / 250 V, ± 0.8% / 1%
	V/AC: (40 - 400 Hz): 2 mV...200 / 250 V, ± 1% / 1.2%
Current range:	A/DC: 20...200 mA, ± 1.2%
	A/AC: (40 - 400 Hz): 20...200 mA, ± 1.5%
Resistance range:	0.2 ...200 kΩ, ± 1.2% / 1%
	200 kΩ...2 MΩ / 2...20 MΩ, ± 1.2% / 1.5%

Inclusive: MultiMeter-PocketBox, 2 test prods, batteries

ORDER NO. PU

083.028E 5



4 021563 736058



CAT III
300V

AutoSound

2x
LR44

MULTIMETERS AND CABLE CHECKERS

MultiMeter-Pocket



Info

Fully protected universal multimeter – for measurements in all building installations

- Precise voltage, current and resistance measurement
- Automatic continuity tester
- Diode test function for determining integrity and polarity
- Integrated contactless voltage indicator
- Single-pole phase testing
- Fully protected design in all measuring ranges prevents operating errors
- Integrated torch for illuminating the test area

Voltage range:	V/DC: 0.2...600 V, $\pm 1.2\%$ V/AC: 2...600 V, $\pm 2.3\%$
Current range:	A/DC: 0...200 mA, $\pm 2\%$ A/AC: 0...200 mA, $\pm 2.5\%$
Resistance range:	0.2...200 k Ω / 2 M Ω / 20 M Ω , $\pm (1.2\% / 5\% / 10\%)$

Inclusive: MultiMeter-Pocket, 2 test prods, batteries

ORDER NO. PU

083.032E 5



4 021563 735754



MultiMeter-Compact



Info

Professional multimeter with all functions for exact electrical measurement

- Precise voltage, current, resistance, capacitance, frequency and duty factor measurement
- Automatic range changeover and manual range preselection
- Automatic continuity tester
- Diode test function for determining integrity and polarity
- Integrated contactless voltage indicator with acoustic, visual and vibration warning
- High measurement resolution for precisely determining different measurement variables
- Compact, impact-resistant enclosure with base support and selector switch
- Large, easy-to-read LC display

Voltage range:	V/DC: 0.4 V / 4...40...400 V / 600 V $\pm (0.5\% / 1.2\% / 1.5\%)$ V/AC: 0.4 V / 4 V / 40...400 V / 600 V $\pm (1.5\% / 1.2\% / 1.5\% / 2.0\%)$
Current range:	A/DC: 0...10A, $\pm 2.5\%$ A/AC: 0...10A, $\pm 3.0\%$
Resistance range:	0.4...4...40...400 k Ω ...4 M Ω / 40 M Ω $\pm (1.2\% / 2.0\%)$
Capacitance range:	40 nF / 400 nF...4...40 μ F / 100 μ F $\pm (5\% / 3\% / 5\%)$
Frequency range:	0...10 MHz / $\pm 1.5\%$
Duty factor range:	0.1...99.9% / $\pm 1.2\%$

Inclusive: MultiMeter-Compact, 2 test prods, battery

ORDER NO. PU

083.034E 5



4 021563 736065



MultiClamp-Meter



Info

Professional current and voltage clamp meter with true r.m.s. measurement

- Measurement in all closed current circuits (AC/DC)
- Automatic continuity tester
- DC zeroing for exact DC measurement results
- Automatic diode measurement
- Peak-HOLD function for determining short-term making current
- High measurement resolution for precisely determining current, voltage and resistance
- Integrated contactless voltage indicator to quickly determine live parts
- Min./Max. function for determining changing measurement variables
- Bright LED lighting for integrated test point illumination
- Backlit LC display with bar graph display

Voltage range:	V/DC: 0...600 V / $\pm 1.5\%$ V/AC: 0...600 V / $\pm 1.0\%$
Resistance, continuity test:	600 V AC/DC
Current range:	A/AC: 0...200 A / $\pm 2.5\%$ (PEAK 282,8 AAC) A/DC: 0...200 A / $\pm 2.0\%$
Frequency range:	50/60Hz AC (True RMS)

Inclusive: MultiClamp-Meter, 2 test leads, batteries

ORDER NO. PU

083.040E 5



4 021563 738991



ACCESSORIES FOR LASER MEASURING DEVICES AND MORE...

- Tripods
- Fasteners
- LPG gas level check



FixPod 155cm



Info


Camera tripod

- 3-way tripod head
- Crank lift (30cm) and telescopic tripod legs
- Rubber-steel tips for use on different surfaces

For all laser measuring devices with 1/4" threads.



Inclusive:
softbag



ORDER NO. PU

090.132E 6



4 021563 736966




VarioStand 45cm



Info

Crank tripod 45cm

- Handy crank tripod for applications close to the ground



ORDER NO. PU

080.22E 4



4 021563 736928




VarioStand L 120cm



Info

Variable crank tripod with adapter

- With adapter for mounting devices with 1/4" and 5/8" thread
- Special combination feet (rubber steel tips) facilitate adaptation to different surfaces
- Crank lift and telescopic tripod legs



ORDER NO. PU

080.29E 1



4 021563 736942



Inclusive: 1/4"- and 5/8"-adapter for mounting devices




VarioStand L 180cm



Info

Variable crank tripod with adapter

- With adapter for mounting devices with 1/4" and 5/8" thread
- Special combination feet (rubber steel tips) facilitate adaptation to different surfaces
- Telescopic tripod legs



ORDER NO. PU

080.27E 1



4 021563 736935



Inclusive: 1/4"- and 5/8"-adapter for mounting devices



VarioStand L 200cm

NEW



Info



Solid aluminium tripod with crank lift, large working range, flexible tripod feet and practical transport size

- Maximum height of 200cm for flexible application possibilities
- Lightweight and robust aluminium profile
- Precise, convenient adjustment of the working height by crank lift
- Movable tripod feet compensate for unevenness in the floor
- Easy handling and secure hold thanks to non-slip rubber pads
- Practical transport: can be folded to just 70cm



Inclusive: 1/4" - and 5/8" -adapter for mounting devices

ORDER NO. PU

080.23E 1




4 021563 740352



TelePod Plus 330cm



Info

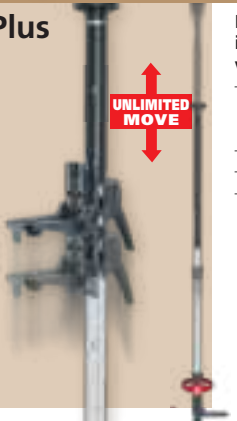

UNLIMITED
MOVE

High-quality aluminium telescopic stand, ideal for quick changes in applications where working positions vary

- The stand is clamped between floor and ceiling then the laser measuring tool is turned manually to set it to the correct height ready for operation.
- Clamping bracket with fine adjustment
- 5-piece design for easy transport
- Height approx. 330cm

5-piece design for easy transport



Inclusive: clamp bracket, softbag

ORDER NO. PU

090.122E 4



4 021563 736959



FlexClamp



Info



Universal clamping bracket

- Easy-to-adjust clamping bracket
- Versatile damage free mounting options for surfaces
- Easy-to-adjust height and position of the measuring device
- With base

Recommended for EasyCross-Laser Green, SmartCross-Laser X / GX, CompactLine-Laser G360.



ORDER NO. PU

090.133E 5



4 021563 736973



GasCheck



Info



Measuring device for determining the level in steel LPG cylinders (5kg / 11kg)

- Ideal for camping, BBQs, radiant heaters or working with gas burners
- Visual signal for indicating level
- Auto shut-off function



Steel cylinder diameter: 200...350mm

Inclusive: GasCheck, battery

ORDER NO. PU

082.163E 5



4 021563 735198



Check gas stocks in advance!

For steel LPG cylinders (5kg / 11kg)

- No time-consuming dismantling and weighing necessary
- Level indicated by visual signal
- Quick, safe measurement



BBQ, KITCHEN AND OUTDOOR

- Temperature measuring devices
- Professional barbecue lightning
- Wood moisture measuring device
- Level measuring device

PERFECT BBQ

THERMOCONTROL DUO



Digital thermometer for monitoring the cooking stage of meat and fish dishes with Digital Connection interface

- Precise evaluation of cooking stage/core temperature
- Digital Connection interface for measurement data transfer
- Powerful adhesion magnets
- Energy-saving Auto Off function

ThermoControl app

- App for adjusting pre-set core temperature, specific temperature, any preferred time
- Optical and acoustic signals
- 5 cooking stages of rare, medium rare, medium, medium well, and well done
- Dishes are divided into beef, pork, lamb, poultry, fish
- Easy-to-read display

Measuring range: -50°C...300°C

Accuracy:
 ± 1°C (0°C...100°C)
 ± 2°C (-20°C...0°C / 100°C...150°C)
 ± 3°C (-50°C...-20°C / 150°C...200°C)
 ± 5°C (200°C...300°C)

Inclusive: ThermoControl Duo, 2 plug-in sensors
 2x measuring cable plug, 2x measuring cable coil, battery

ORDER NO. PU

082.429A 5



THERMOCONTROL AIR



Cordless thermometer for measuring the core temperature of all sorts of meat, poultry and fish with Digital Connection interface

- Precise evaluation of cooking stage/core temperature
- Effective monitoring of oven temperature
- Easy to use - no inconvenient cables
- Can also be used with rotisseries
- Digital Connection interface for measurement data transfer
- Powerful adhesion magnet

ThermoControl App

- Product description same as ThermoControl Duo

Ambient temperature: 0°C...300°C

Accuracy: ± 1°C

Contact temperature: 0°C...85°C

Accuracy: ± 1°C

Inclusive: ThermoControl Air, battery

ORDER NO. PU

082.425A 5



THERMOMAÎTRE



Professional thermometer for grilling, cooking and roasting with display for ideal temperatures for beef, pork, lamb, chicken and fish

- Precise measurement of core temperature
- Short measuring times thanks to high-speed sensor technology
- Long probe can be easily inserted and prevents accidental scalding
- Easy-to-read display

Measuring range: -40°C...230°C

Accuracy:
 <-18°C ± 4°C, -18°C...100°C ± 2°C,
 >100°C ± 4°C

Inclusive: ThermoMaître, batteries

ORDER NO. PU

082.029A 5



THERMOSPOT



Non-contact infrared temperature instrument

- Precise temperature measurement of surfaces and materials
- Measuring range can be clearly pinpointed thanks to target laser
- Practical display of minimum and maximum values through continuous measurements
- Short-term automatic saving of the last measurement value
- Energy-saving Auto Off function

Measuring range: -40°C...400°C

Accuracy:
 ± 2°C + 0.1°C / degree (-40°C...0°C)
 ± 2°C or ± 2% depending on the higher value (0°C...400°C)

Inclusive: ThermoSpot, battery

ORDER NO. PU

082.441A 1



BBQ, KITCHEN AND OUTDOOR

NOVAMASTER 200



Info



Convenient LED head torch

- Head can be swivelled up to 90° in steps
- 2 different light levels to suit requirements (high or low)
- Hands-free all the time
- Rubber insert provides secure seating, no slipping or shifting out of place
- Extremely comfortable: elastic headband, can be adjusted to any head size

Inclusive: NovaMaster 200, headband, batteries

ORDER NO. PU

030.400A 5



4 021563 717408



NOVAMASTER 500



Info



Splash-proof torch with adjustable head for optimum illumination of the working area

- 4 different light levels to suit requirements (high, boost, medium and low)
- Strong magnetic clamps
- Pocket clip makes it easy to carry around
- Rechargeable via USB-cable

RECHARGEABLE LI-ION BATTERY PACK

Inclusive: NovaMaster 500, USB-cable, Li-Ion battery

ORDER NO. PU

030.200A 5



4 021563 717415



NOVAMASTER 800



Info



Fold-out torch - head can be rotated through 360° and can swivel by 180°

- High luminosity of 800 lumens
- 4 different light levels to suit requirements (high, boost, medium and low)
- Strong magnetic clamps
- Pocket clip makes it easy to carry around
- Removable lithium-ion battery
- Rechargeable via USB-cable

RECHARGEABLE LI-ION BATTERY PACK

Inclusive: NovaMaster 800, USB-cable, Li-Ion battery pack

ORDER NO. PU

030.250A 5



4 021563 717422



WOODTESTER



Info

Compact wood moisture measuring device

- Effective reduction of energy and pollutants through precise determination of the dryness level of firewood
- Dual scale for differentiating between wood groups
- Simple testing of the measuring instrument using reference measurement through the protective cap
- Energy-saving Auto Off function
- Battery status visible at all times through low battery display
- Simple one-button operation
- Sturdy, ergonomically designed housing

Material moisture (resistive)

Accuracy (absolute):

Wood: ± 2%

Inclusive: WoodTester, protective cap with self-test function, battery

ORDER NO. PU

082.006A 5



4 021563 719426



BBQ-GAS CHECK



Info

Measuring device for determining the level in steel LPG cylinders (5kg / 11kg)

- Ideal for camping, BBQs, radiant heaters or working with gas burners
- Visual signal for indicating level
- Auto shut-off function

Steel cylinder diameter: 200...350mm

Inclusive: BBQ-GasCheck, battery

ORDER NO. PU

082.161A 5



4 021563 696482





CERTIFIED DESIGN AND QUALITY

Devices have a warranty of 4 years from purchase date on. Rechargeable batteries and accessories are excluded.

Further information on www.laserliner.com/garantie



UMAREX GmbH & Co. KG
– Laserliner –

Gut Nierhof 2
59757 Arnsberg, Germany
Phone +49 2932 9004-0
info@laserliner.com
www.laserliner.com

Valid from 01.01.2025. With this Retail Program all previous Retail Programs lose their validity. Subject to our General Terms and Conditions of Delivery and Payment. These offers are determined for industry, commerce, handcraft and trade.

Changes in colour and design, setting combinations and product images as well as technical enhancements reserved. All information without liability on our part.

Photo archives: UMAREX Laserliner · istockphoto · shutterstock · Adobe Stock

020.25.03EN 500 25W12