

## SensoLite G 210 Set




### Laser receiver for green rotary lasers

This laser receiver is suitable for green rotary lasers and provides rapid, close and long-range alignment within a 200 metre range. The easy-to-read LC display on the front and clear acoustic signals provide the user with information on the height of the laser beam. The universal mount allows the device to be easily attached to levelling staffs. The integrated head magnet allows the device to be attached to metal surfaces.

- Suitable for green rotary lasers
- Fast alignment work in close and long range
- Easily fixed to measuring staff with universal holder
- Head magnet allow quick attachment to metallic surfaces
- Switchable, extremely loud Piezo buzzer sound

#### TECHNICAL SPECIFICATIONS

PROTECTION CLASS	IP 66
POWER SOURCE	4 x 1.5V LR03 (AAA)
OPERATING TIME	approx. 80 hours
OPERATING CONDITIONS	-10°C ... 40°C, max. humidity 20 ... 85% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-20°C ... 70°C, max. humidity 80% rH
DIMENSIONS (W X H X D)	75 mm x 148 mm x 22 mm x (without universal mount)
WEIGHT	215 g (incl. batteries)

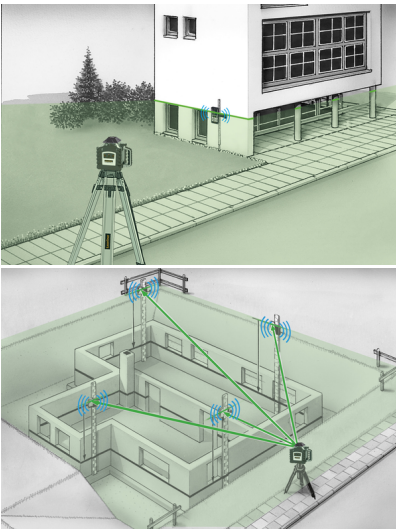

**HIGH!  
SPEED!**

AutoSound



IP 66

4x AAA

HARD

