



DampMaster Compact

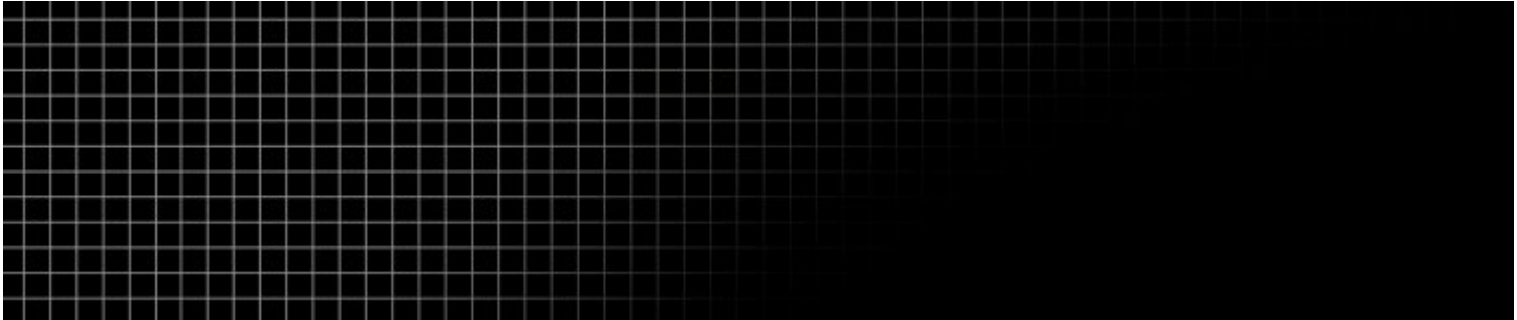

TECHNICAL SPECIFICATIONS

MEASURED VARIABLE	Moisture content of material (resistive) Ambient temperature
MODE	Wood (3 groups) Building materials (31 materials) Index Test
MEASURING RANGE AMBIENT TEMPERATURE	-10°C ... 50°C
ACCURACY AMBIENT TEMPERATURE	± 2°C
MEASURING RANGE WOOD	Wood group A: 4.6% ... 91.6% Wood group B: 6.1% ... 103.6% Wood group C: 3.0% ... 79.2%
ACCURACY (ABSOLUTE) WOOD	± 1% (5% ... 30%) ± 2% (<5% and >30%)
MEASURING RANGE BUILDING MATERIALS	Anhydrite screed (AE, AFE): 0% ... 29.5% Concrete C12/15: 0.7% ... 3.3% Concrete C20/C25: 1.1% ... 3.9% Concrete C30/C37: 1.4% ... 3.7% Gypsum plaster: 0.1% ... 38% ... 12.7% Limestone, bulk density 1.9: 0.8% Cellular concrete (Hebel): 2.2% ... 171.2% Cement screed without additive: 1.0% ... 4.5%
ACCURACY (ABSOLUTE) BUILDING MATERIALS	± 0.15%