


## AutoCross-Laser 2 Pro

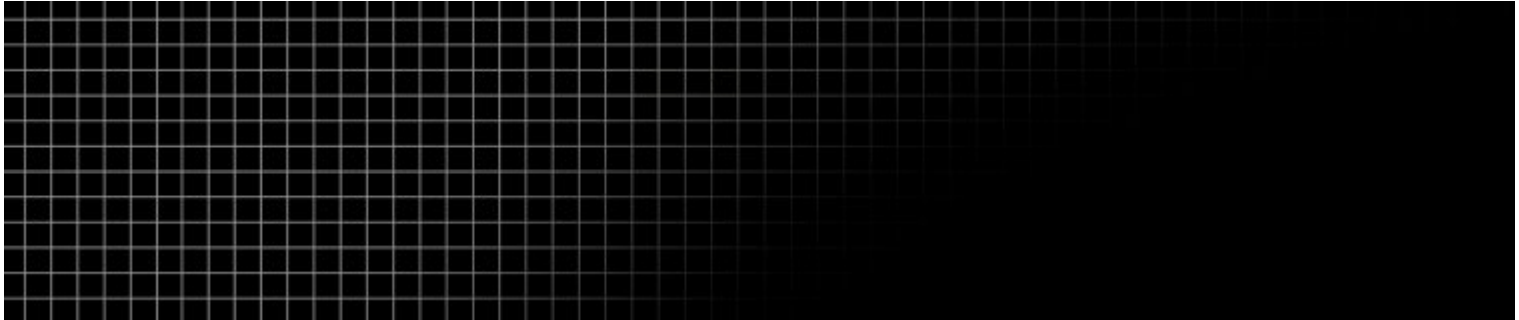

### TECHNICAL SPECIFICATIONS

<b>SELF-LEVELLING RANGE</b>	± 3°
<b>ACCURACY</b>	± 0.2 mm / m
<b>LEVELLING</b>	automatic
<b>VISIBILITY (TYPICAL)*</b>	20 m
<b>WORKING RANGE WITH HAND RECEIVER</b>	(depends on how the technology affects the difference in brightness) 40 m
<b>LASER WAVELENGTH</b>	635 nm
<b>LASER CLASS</b>	2 / < 1 mW (EN 60825-1:2014/AC:2017)
<b>POWER SOURCE</b>	3 x 1.5V LR6 (AA)
<b>OPERATING TIME</b>	approx. 20 hours
<b>OPERATING CONDITIONS</b>	0°C ... 50°C, max. humidity 80% rH, no condensation, max. working altitude 2000 m above sea level
<b>STORAGE CONDITIONS</b>	-10°C ... 70°C, max. humidity 80% rH
<b>DIMENSIONS (W X H X D)</b>	115 mm x 95 mm x 65 mm
<b>WEIGHT</b>	500 g (incl. battery)