
Laserliner



This laser receiver is suitable for green rotary lasers and allows time-saving, close and long-range alignment work The easy-to-read LC display on the front and clear acoustic signals provide the user with information on the height of the laser beam. The universal mount allows the device to be easily attached to levelling staffs. The integrated head magnet allows the device to be attached to metal surfaces.

- Fast alignment work in close and long range
- · Easily fixed to measuring staff with universal holder
- Head magnet allow quick attachment to metallic surfaces
- · Switchable, extremely loud Piezo buzzer sound

TECHNICAL DATA	
Protection Class	IP 54
Power Supply	2 x 1.5V LR03 (AAA)
Operating Conditions	0°C 40°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
Storage Conditions	-10°C 70°C, max. humidity 80% rH
Dimensions (W x H x D)	23 mm x 110 mm x 60 mm
Weight	138 g (incl. battery)

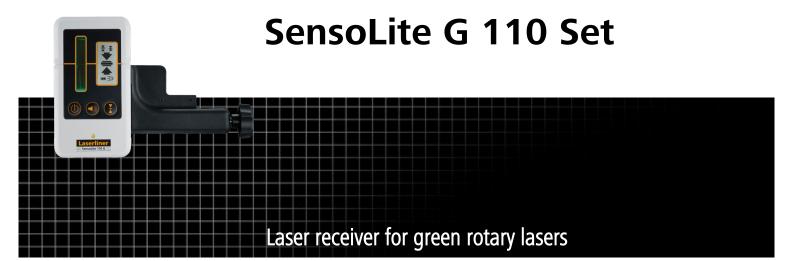