

Cubus 110 S Set 2




Fully automatic rotary laser with SensoLite 110 laser receiver, 165 cm light-weight tripod and 5 m LT telescopic levelling staff

Horizontals, verticals and inclinations can be precisely aligned with this robust and fully automatic rotary laser. All functions can be easily controlled with the remote control up to a maximum distance of 30 metres. Partitions can be aligned with the additional reference beam. The laser receiver can easily be attached to metallic surfaces using the practical magnetic clamps. The lightweight tripod with milled mounting surface has a carrying strap and a hook for attaching a plumb bob. The easy-to-read telescopic levelling staff completes the set. It has a robust aluminium profile and can be used in extremely demanding conditions. It has a maximum height of 5 metres and a minimum height of 1.22 metres.

- Exact horizontal alignment
- Time-saving fully automatic alignment by means of automatic sensor
- Manual alignment of slopes
- Extremely simple operation for practical use
- The 90° reference beam is provided to plumb and align partition walls
- All functions can be controlled with the remote control up to a max. distance of 40 m
- Plug-on stand/wall bracket with 5/8" thread for vertical use
- Reliable measurement through automatic power off with ADS tilt
- Robust waterproof housing

TECHNICAL DATA

Self-levelling Range	± 4°
Accuracy	±0.15 mm/m
Levelling	automatic horizontal / vertical levelling with electronic levels and motors
Laser Wavelength	635 nm
Laser Class	2 / < 1 mW
Laser Modes	Hand receiver mode Spot mode Rotary mode Scan mode
Protection Class	IP 66
Operating Time	approx. 16 hours
Battery Recharging Time	approx. 4 hours
Operating Conditions	-10°C ... 50°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level

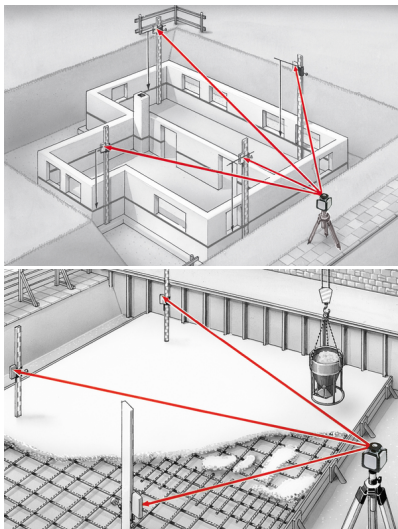

SCOPE OF DELIVERY



2x AAA

Item No. 052.200-2

GTIN (EAN) 4021563700806

SU 1