




## Crank Tripod 300 cm



Heavy design with integrated professional crank height adjustment

This robust crank tripod with 5/8" threaded adapter has an extremely long crank stroke (70 cm) which can be adjusted and locked without any play and is adjustable over a wide range. The combination of rubber and steel on the tips of the feet easily adapt to the surface. Other features include stable feet and steel chains.

- Exact and reliable installation of laser measuring instruments
- An extremely long crank stroke allows a large adjustment range
- Crank stroke can be fixed and can be set without play
- With 5/8" adapter
- Easily adaptable to the ground surface thanks to combined rubber and steel tips
- Strong steel feet
- Steel chains

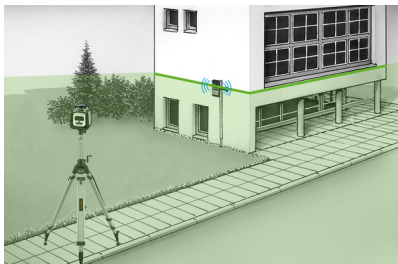

### TECHNICAL DATA

<b>Material</b>	Aluminum
<b>Max. Load Capacity</b>	8 kg
<b>Max. Height</b>	2950 mm
<b>Min. Height</b>	1290 mm
<b>Tripod Connection</b>	5/8" thread
<b>Operating Conditions</b>	-10°C ... 50°C, max. humidity 85% rH, no condensation, max. working altitude 4000 m above sea level
<b>Storage Conditions</b>	-20°C ... 70°C, max. humidity 80% rH, no condensation
<b>Dimensions (W x H x D)</b>	220 mm x 1360 mm x 190 mm x (without accessories)
<b>Weight</b>	8500 g (without accessories)

