




## CompactCross-Laser Set

Automatic cross-line laser with digital interface and useful wall bracket


This automatic cross-line laser makes accurate alignment of horizontal and vertical surfaces and slopes extremely easy. The device features individually selectable laser lines and is easy to control from a smart phone in difficult to access locations with the free Commander app. The magnetic bracket allows the laser to be attached to walls, metal surfaces and tripods with 1/4" or 5/8" thread. The integrated hand-held receiver mode ensures optimum use outdoors and over long ranges. A pendulum lock provides excellent protection for the pendulum system during transportation. The tilt function prevents measurement errors due to unintended changes in the position of the laser.

- Accurate horizontal and vertical alignment of objects
- Easy alignment of slopes
- Digital Connection interface for remote control with smartphones using the Commander app
- Diverse range of mounting options on tripods, walls and metal surfaces
- Good visibility through green laser technology
- Effective protection against measurement errors through tilt function
- Time-saving automatic alignment
- With integrated handheld receiver mode

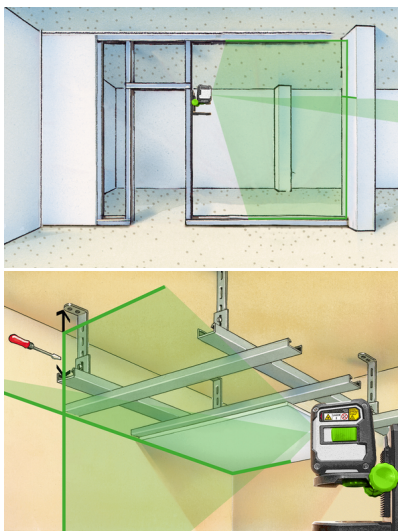

### TECHNICAL DATA

<b>Self-levelling Range</b>	± 4°
<b>Accuracy</b>	± 0.35 mm / m
<b>Levelling</b>	horizontal / vertical automatic
<b>Visibility (Typical)*</b>	40 m
<b>Working Range with Hand Receiver</b>	(depends on how the technology affects the difference in brightness) 40 m
<b>Laser Wavelength</b>	515 nm
<b>Laser Class</b>	2 / < 1 mW (EN 60825-1:2014 / A11:2021 / EN 50689:2021)
<b>Power Supply</b>	2 x 1.5V LR6 (AA)
<b>Operating Time</b>	approx. 3 hours
<b>Operating Conditions</b>	0°C ... 50°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
<b>Storage Conditions</b>	-10°C ... 70°C, max. humidity 80% rH
<b>Dimensions (W x H x D)</b>	75 mm x 88 mm x 58 mm
<b>Weight</b>	246 g (incl. batteries)

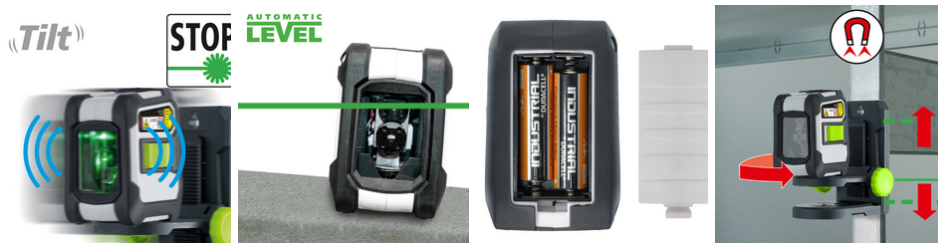

### SCOPE OF DELIVERY



Item No. 081.146A      GTIN (EAN) 4021563723867      SU 5