
Laserliner



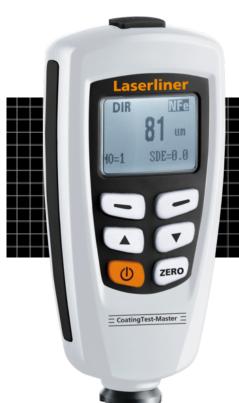

Coating thickness measuring instrument for measuring non-metallic layers on metal surfaces

This point precise coating thickness measuring instrument is suitable for insulating and non-magnetic coatings on nonferrous metals. The base material is identified automatically (ferrous/ferromagnetic, non-ferrous/non-ferromagnetic). The device features one-point or two-point calibration to increase the measuring accuracy. 400 measured values can be saved to the internal memory and transferred to a PC via the USB interface for further analysis.

- Point precise coating thickness measurement based on induction and eddy current principle
- Measurable coatings: non-magnetic (paint, zinc on steel) and insulating (paint, anodised coatings)
- Automatic identification of base material (ferrous/ ferromagnetic, non-ferrous/non-ferromagnetic)
- Comprehensive data backup due to internal memory for 400 measured values
- Increased measuring accuracy due to one-point and twopoint calibration
- USB interface for analysis on PC
- Min/Max/AVG display
- · Easy-to-read display

TECHNICAL DATA	
Measured Variable	Coating thickness
Mode	Measurement principle manual / automatic Single / continuous measurement mode Direct measurement / group measurement
Coating Thickness Measuring Range	0 1250 μm
Coating Thickness Accuracy	0 850 μm (± (3% +1 μm)) 850 1250 μm (± 5%)
Sensor Type	Magnetic-inductive (Fe), eddy current (NFe)
Port	USB
Memory	80 measurements / mode
Power Supply	2 x 1.5V LR03 (AAA)
Dimensions (W x H x D)	23 mm x 110 mm x 50 mm x #
Weight	116 g











SCOPE OF DELIVERY

