


InspectorCamera 3DM (6mm; 1 m)

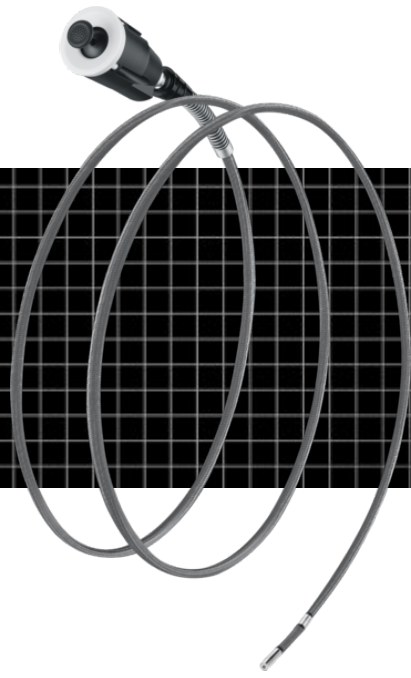


Controllable camera unit for the VideoInspector with an individually adjustable and compact camera head – provides high flexibility for complex tasks and is ideal for small openings



The controllable camera unit features an individually movable camera head that can be quickly adjusted to the optimal perspective using the joystick on the VideoInspector base unit. This allows for the inspection of hard-to-reach areas that are not visible with rigid camera systems. The small diameter of the camera head also enables the inspection of very small openings. The inspection is highly reliable, allowing 360° checks of items such as pipe seals and precise detection of damaged areas. The camera head and probe are waterproof and resistant to diesel, gasoline, motor oil, AdBlue®, ethyl alcohol, and saltwater, making the device versatile. Eight high-performance LEDs provide excellent object illumination.

TECHNICAL DATA


Diameter Camera Head	6 mm
Camera Resolution	1280 x 720 pixels
Field of View (FOV)	78°
Depth of Focus (DOF)	3 ... 8 cm
Length of Probe	1 m
Dimensions (W x H x D)	1050 mm x 42 mm x 42 mm
Weight	135 g #

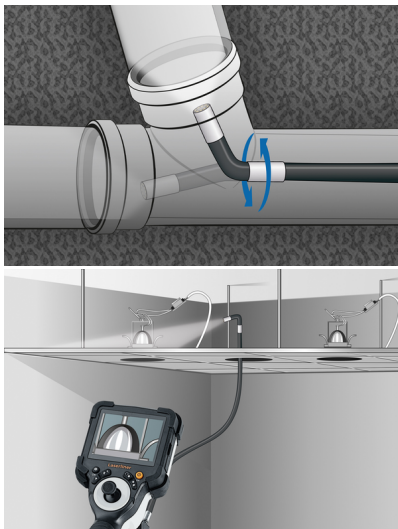

- Controllable camera unit for the VideoInspector
- Effective problem localisation behind or in objects, walls, pipes, cavities
- Joystick control of the camera head provides maximum flexibility and optimum viewing
- Compact camera head ideal for inspecting small openings
- Save time setting up on site with rapid adjustment of the required viewing angle

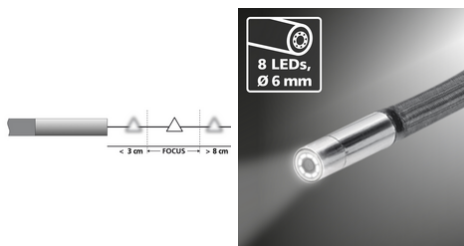

SCOPE OF DELIVERY

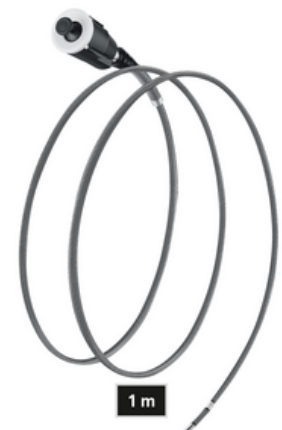

Item No. 082.234.1 GTIN (EAN) 4021563736898 SU 1