Laserliner

InspectorCamera Mini (6mm; 1,5 m)

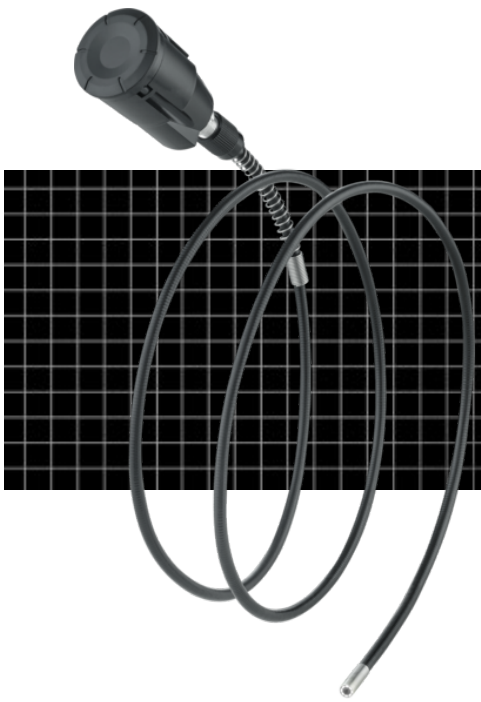

Camera unit for VideoInspector with compact camera head, ideal for confined areas

This camera unit is suitable for use with the VideoInspector base unit and enables accurate localisation of problems behind or in objects, walls, pipes and cavities. The camera head and probe are waterproof and resistant to petrol and diesel, while the compact camera head is particularly suitable for confined areas. Eight high-performance LEDs provide first-class LED object illumination.

- Camera unit for VideoInspector
- Effective problem localisation behind or in objects, walls, pipes, cavities
- The camera head and probe are waterproof and resistant to petrol and diesel
- 8 high-performance LEDs on the camera for powerful object lighting

TECHNICAL DATA	
Diameter Camera Head	6 mm
Camera Resolution	1280 x 720 pixels
Field of View (FOV)	80°
Depth of Focus (DOF)	3 … 8 cm
Length of Probe	1.5 m
Ports	Industrial connector for camera
Dimensions (W x H x D)	1580 mm x 42 mm x 42 mm
Weight	175 g



1280 x 720 pixel | LED LIGHT | IP 68

SCOPE OF DELIVERY

Item No. 082.237.1	GTIN (EAN) 4021563737734	SU 1

UMAREX GmbH & Co. KG • Laserliner • Gut Nierhof 2 • 59757 Arnsberg • Germany • Tel. +49 2932 9004-0 • info@laserliner.com • www.laserliner.com