


## InspectorCamera 3D (6mm; 2 m)

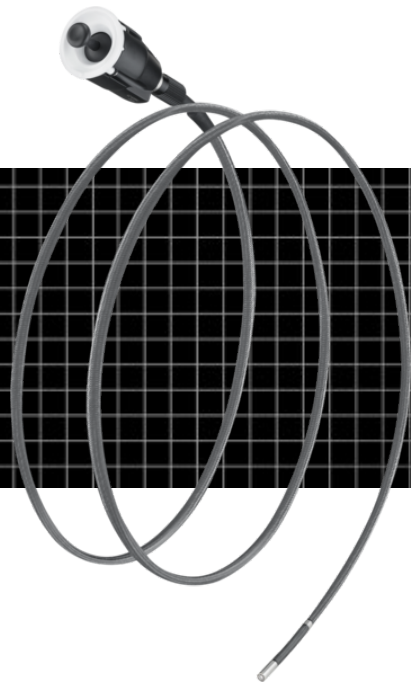

Steerable camera unit for VideoInspector 3D with 2 metre long probe and individually movable, small camera head - high flexibility for complex work, ideal for small openings



This steerable camera unit for the VideoInspector 3D with 2 metre long probe offers high flexibility for complex work and is ideal for small openings. The waterproof titanium camera head with a maximum manoeuvrability of 160° can be quickly adjusted to the optimum perspective using 3D control. This makes it possible to examine hard-to-reach areas that are not visible with fixed camera systems. Thanks to the object illumination with six high-performance ceramic LEDs, clear images can be achieved even under the worst conditions.

### TECHNICAL DATA


<b>Diameter Camera Head</b>	6 mm
<b>Camera Resolution</b>	960 x 720 pixels
<b>Field of View (FOV)</b>	85°
<b>Depth of Focus (DOF)</b>	2.5 ... 10 cm
<b>Length of Probe</b>	2 m
<b>Dimensions (W x H x D)</b>	45 mm x 2150 mm x 45 mm
<b>Weight</b>	240 g #



- Steerable camera unit for VideoInspector 3D
- This 2 m long camera unit is the perfect solution for leak detection applications
- Small camera head, ideal for places that are hard to reach
- Manual 3D control of titanium camera head which moves through max. 160°
- Sturdy, durable adjustment mechanism
- Powerful object lighting thanks to 6 high-performance ceramic LEDs
- High-grade, long-life flexible tungsten tubing

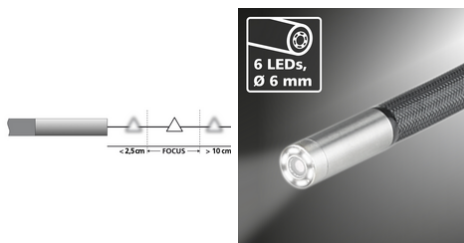

### SCOPE OF DELIVERY

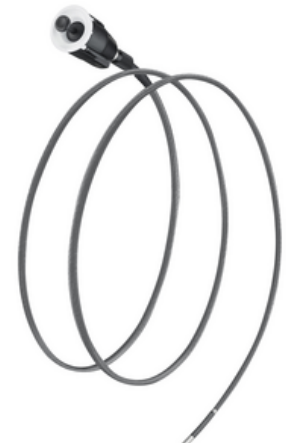

Item No. 082.275.1

GTIN (EAN) 4021563732159

SU 1