


HD DuoCamera 7,9mm, 3m

Camera unit for the VideoFlex HD with changeable front and side views


This camera unit for the VideoFlex HD is suitable for precise problem localisation in pipelines, wall cavities and motor vehicles. Detailed images and videos can be recorded with the high-resolution camera; these are then displayed on the display of the base unit any without loss of quality. Users can quickly switch between the front and side cameras at the push of a button to obtain the desired view of the inspection area. Thanks to the first-class object lighting provided by seven high-performance LEDs, you can capture reliable images in very poor conditions. The magnet and hook sets can be attached to the water, petrol and diesel-resistant camera head for lifting or pulling difficult to reach objects.

TECHNICAL DATA

Diameter Camera Head	7.9 mm
Camera Resolution	1280 x 720 pixels
Field of View (FOV)	80°
Depth of Focus (DOF)	Front: 3 ... 8 cm / Side: 2 ... 5 cm
Length of Probe	3 m
Ports	Industrial connector for camera
Dimensions (W x H x D)	3100 mm x 21 mm x 21 mm
Weight	343 g #

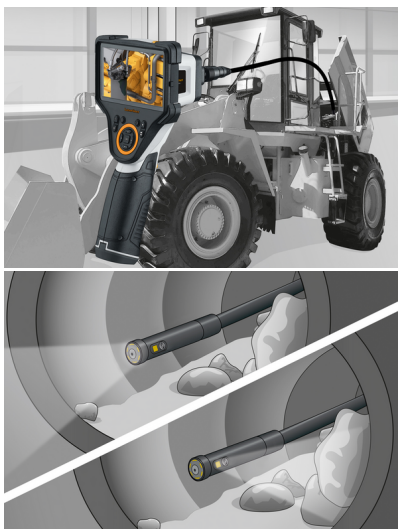

- Camera unit for the VideoFlex HD
- Effective problem localisation behind or in objects, walls, pipes, cavities
- Quick change of view at the touch of a button thanks to front and side cameras
- Very detailed image and video capture using high-resolution camera and 1:1 reproduction on the base unit display with no loss of quality
- 7 high-performance LEDs on the camera for powerful object lighting

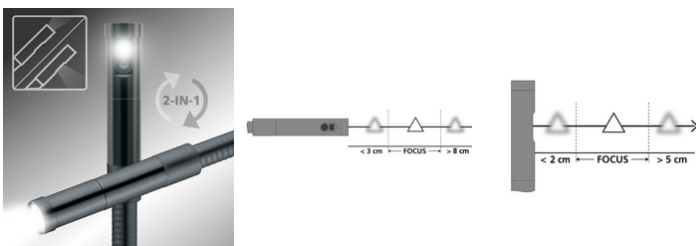

1280 x 720 pixel

LED LIGHT

IP 68

SCOPE OF DELIVERY



Item No. 082.280.55 GTIN (EAN) 4021563726356 SU 1