






## FlexClamp



### Universal clamp

Universal clamping bracket allows optimum use of cross line lasers in interior finishing applications. The position and height of the measuring tool can be set quickly and easily. Fastens in place without damaging surfaces.

- Optimum use of cross-line lasers in indoor finishing work
- Versatile damage-free mounting options
- With base
- Height and position of the measuring device easily adjustable
- With 1/4" thread

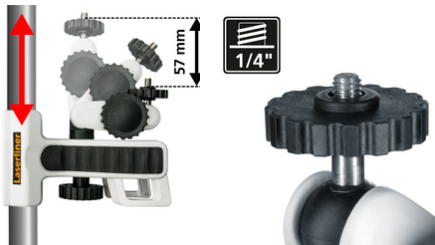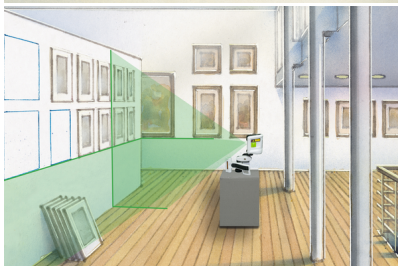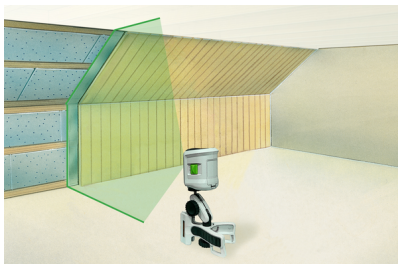

#### TECHNICAL DATA

<b>Material</b>	Polymer
<b>Max. Height</b>	155 mm
<b>Min. Height</b>	91 mm
<b>Tripod Connection</b>	1/4" thread
<b>Operating Conditions</b>	-10°C ... 50°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
<b>Storage Conditions</b>	-20°C ... 70°C, max. humidity 80% rH
<b>Dimensions (W x H x D)</b>	97 mm x 135 mm x 88 mm x (without accessories)
<b>Weight</b>	210 g (without accessories)

#### SCOPE OF DELIVERY

