

# Laserliner


## Crank Tripod 260 cm



### Heavy design with integrated professional crank height adjustment

This robust crank tripod with 5/8" threaded adapter has an extremely long crank stroke (70 cm) which can be adjusted and locked without any play and is adjustable over a wide range. Other product features include stable steel feet and steel chains.

- An extremely long crank stroke allows a large adjustment range
- Crank stroke can be fixed and can be set without play
- With 5/8" adapter
- Strong steel feet
- Steel chains

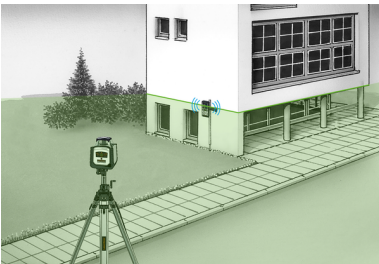

#### TECHNICAL SPECIFICATIONS

MATERIAL	aluminum
MAX. LOAD CAPACITY	8 kg
MAX. HEIGHT	2550 mm
MIN. HEIGHT	1280 mm
TRIPOD CONNECTION	5/8" thread
OPERATING CONDITIONS	-10°C ... 50°C, max. humidity 85% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-20°C ... 70°C, max. humidity 80% rH
DIMENSIONS (W X H X D)	190 mm x 1340 mm x 170 mm x (without accessories)
WEIGHT	7200 g (without accessories)

