



## ActiveFinder




Work safely on electrical lines – in handy pen format

This non-contact voltage tester provides a high level of industrial safety by detecting existing alternating voltages. The device determines the polarity of L- or N-conductors, detects live cables and locates electrical voltages in cables, sockets, bulb sockets and fuses. Cable breaks can be effectively identified. Its compact design, highly visible LED indicators and integrated torch make this a very convenient tool.

- Locates electrical voltages in cables, sockets, bulb sockets and fuses
- Easy determination of the polarity of L/N conductors, e.g. on sockets or terminals
- Effective detection of line breaks in cables and wires
- Extremely high sensitivity for tracing lines at great depths
- Clearly visible LED for indicating electrical voltages
- Integrated torch with separate ON/OFF button
- Robust, impact-resistant housing

### TECHNICAL DATA

|  |   |
|--|---|
| <b>Measured Variable</b>                       | Registration of electrostatic fields produced by alternating voltages |
| <b>Features</b>                                | ZOOM function   |
| <b>AC Voltage</b>                              | Bandwidth:<br>50 ... 60 Hz  |
| <b>External Voltage Range Voltage Detector</b> | 24 ... 1000V AC   |
| <b>Dimensions (W x H x D)</b>                  | 25 mm x 158 mm x 21 mm  |

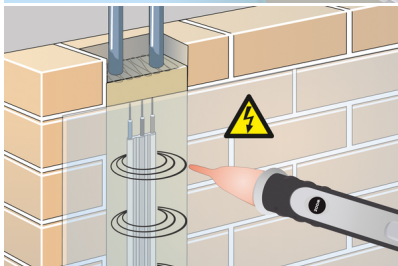

### SCOPE OF DELIVERY



Item No. 083.010A

GTIN (EAN) 4021563671144

SU 5