





ActiveMaster Digital

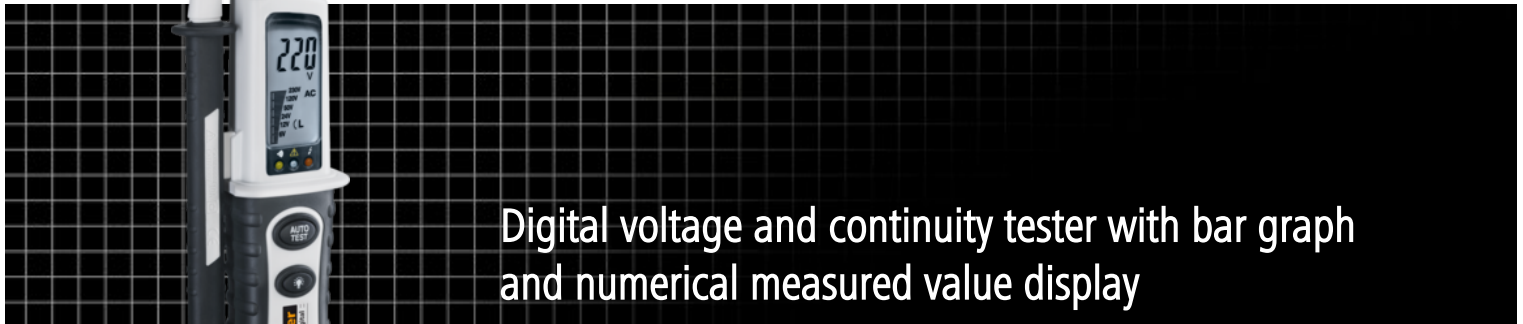

Digital voltage and continuity tester with bar graph and numerical measured value display

The reliable voltage tester with the most commonly used nominal voltages allows the testing of alternating voltage and direct voltage. The automatic range and function changeover is practical and time-saving.

- Reliable and fast voltage tester with the most commonly used nominal voltages
- Practical, automatic test of AC and DC voltage
- Time-saving automatic range and function changeover
- Single-phase and rotary field test with phase sequence display
- Automatic continuity tester with acoustic signal
- Single-pole phase testing
- Safety self-test from 50 V

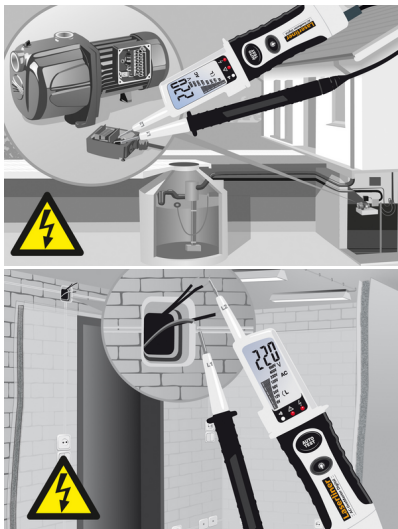

TECHNICAL DATA

Measured Variable	Direct voltage / alternating voltage
Features	automatic measuring range single-pole phase test Determining the rotary field direction Continuity test
AC Voltage	Range / Resolution / Accuracy*: 6, 12, 24, 50, 120, 400, 690V / 1V / ± (1.5% + 5) Bandwidth: 50 / 60 Hz
DC Voltage	Range / Resolution / Accuracy*: 6, 12, 24, 50, 120, 400, 690V / 1V / ± (1.0% + 3)
Protection Class	IP 64
Dimensions (W x H x D)	75 mm x 265 mm x 40 mm
* ± accuracy = [(% of measured value (rdg)) + (number of least significant digits (digit))]	

SCOPE OF DELIVERY



Item No. 083.025A GTIN (EAN) 4021563679836 SU 2