



DampFinder Compact




Universal device for testing moisture in wood and building materials - recycled material is used for sustainability

The material moisture measuring device determines the precise moisture content in per cent of many types of wood and construction materials, perfect for quick checks. Wood moisture measurements are carried out in wood group A or B mode. The index mode allows moisture detection measuring points to be compared. The user can check the accuracy of the device at any time by taking a reference measurement through the protective cap. Easy-to-read display for convenient use. The housing is made from a large proportion of recycled plastic and makes a valuable contribution to sustainability.

- Sustainable design: large proportion of the housing is made from recycled plastic
- Fast and precise measurement of wood and building moisture
- Can be used to test many types of wood
- Index function for optimum evaluation of various material categories
- Effective testing of the measuring instrument using reference measurement through the protective cap
- Practical display of current ambient temperature when switching on
- Easy-to-read display

TECHNICAL DATA

Measured Variable	Moisture content of material (resistive) Ambient temperature
Mode	Wood (2 groups) Building materials (8 materials) Index
Measuring Range Ambient Temperature	-10°C ... 50°C
Accuracy Ambient Temperature	± 2°C
Measuring Range Wood	Wood group A: 5.6% ... 55.4% Wood group B: 7.3% ... 63.3%
Accuracy (Absolute) Wood	± 1% (5% ... 30%) ± 2% (<5% and >30%)
Measuring Range Building Materials	0% ... 38%
Accuracy (Absolute) Building Materials	± 0.15% (0% ... 10%) ± 1% (>10%)

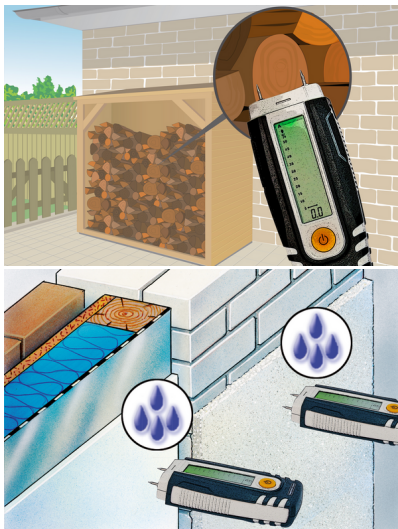

SCOPE OF DELIVERY



4x AAA

Item No. 082.015E GTIN (EAN) 4021563734849 SU 5