


MultiMeter-Compact



Professional multimeter with all functions for precise electrical measurements - use of recycled material for sustainability

The professional, universally applicable multimeter enables fast and accurate measurements in the areas of voltage, current, resistance, capacitance, frequency and duty cycle. The diode test can be used to determine function and polarity. The automatic continuity tester informs the user with an acoustic signal. An easy-to-read LC display with backlighting makes it easy to use. The device has a compact, ergonomic and impact-resistant housing, which is largely made of recycled plastic and therefore makes a valuable contribution to sustainability.

- Sustainable design: large proportion of the housing is made from recycled plastic
- Fast and very precise measurement of voltage, current, resistance, capacitance, frequency, duty factor and contact temperature
- Automatic range changeover and manual range preselection
- Integrity and polarity can be determined using the easy diode test function
- Automatic continuity tester with acoustic signal
- Integrated, non-contact voltage indicator with acoustic, visual and vibration warning

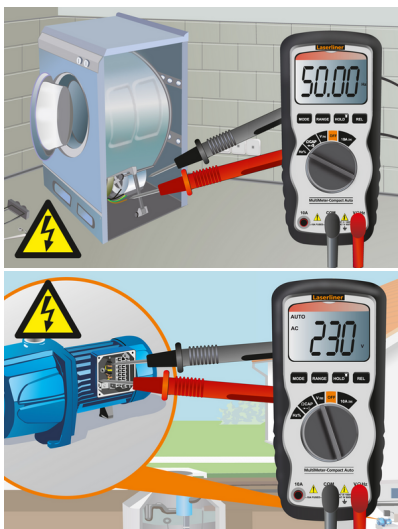

TECHNICAL DATA

Measured Variable	Direct current / alternating current Direct voltage / alternating voltage Resistance Capacitance Frequency
Features	automatic / manual measuring range Comparison measurement HOLD automatic switch-off non-contact alternating voltage detection (AC warning) single-pole phase test
AC Voltage	Range / Resolution / Accuracy*: 400.0 mV / 0.1 mV / $\pm (1.5\% + 4)$ 4.000V / 1 mV / $\pm (1.2\% + 2)$ 40.00V / 10 mV / $\pm (1.2\% + 2)$ 400.0V / 0.1V / $\pm (1.5\% + 3)$ 600V / 1V / $\pm (2.0\% + 4)$
DC Voltage	Range / Resolution / Accuracy*: 400.0 mV / 0.1 mV / $\pm (0.5\% + 2)$ 4.000V / 1 mV / $\pm (1.2\% + 2)$ 40.00V / 10 mV / $\pm (1.2\% + 2)$ 400.0V / 0.1V / $\pm (1.2\% + 2)$ 600V / 1V / $\pm (1.2\% + 2)$
External Voltage Range Voltage Detector	100 ... 600V AC
Dimensions (W x H x D)	70 mm x 150 mm x 48 mm



SCOPE OF DELIVERY



CAT III
1000V

CAT IV
600V

AutoSound

9V

Item No. 083.034E

GTIN (EAN) 4021563736065

SU 5