

Laserliner


MasterCross-Laser 2GP



Green cross-line laser with plumb function, hand-held receiver mode and magnetic clamp and wall bracket

The MasterCross-Laser 2GP allows the exact alignment of horizontals, verticals and slopes. With the additional plumb laser, it is possible to work simultaneously on the floor and the ceiling. The measuring device offers high visibility, time-saving automatic alignment and a variety of mounting options. It is also possible to use it with a tripod.

- Exact horizontal and vertical alignment of objects
- Good visibility through green laser technology
- Additional plumb laser at top and bottom
- Easy alignment of slopes
- Individually switchable laser lines
- Time-saving automatic alignment
- Integrated hand-held receiver mode for outdoor applications
- Simple horizontal and vertical mounting on drywall construction profiles
- With 1/4" thread
- With 5/8" thread

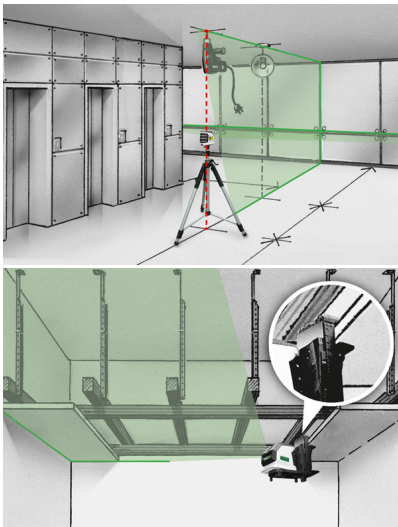

TECHNICAL SPECIFICATIONS

SELF-LEVELLING RANGE	± 3°
ACCURACY	± 0.2 mm / m
LEVELLING	automatic
VISIBILITY (TYPICAL)*	55 m
WORKING RANGE WITH HAND RECEIVER	(depends on how the technology affects the difference in brightness) 60 m
LASER WAVELENGTH	515 nm
LASER CLASS	2 / < 1 mW (EN 60825-1:2014/AC:2017)
POWER SOURCE	4 x 1.5V LR6 (AA)
OPERATING TIME	approx. 4 hours
OPERATING CONDITIONS	0°C ... 50°C, max. humidity 85% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-10°C ... 70°C, max. humidity 85% rH
DIMENSIONS (W X H X D)	66 mm x 100 mm x 125 mm
WEIGHT	570 g (incl. batteries)
	* at max. 300 lux



MasterCross-Laser 2GP

ORDER NO. 031.390A

EAN-CODE 4021563711017

PU 1